


INITIAL TRENCH ANCHOR DETAIL

APPLIED AT THE DOWNSTREAM END OF DITCH

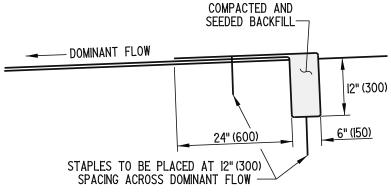

TERMINAL TRENCH ANCHOR DETAIL


APPLIED AT THE UPSTREAM END OF DITCH


COMPACTED AND SEEDED BACKFILL — DOMINANT FLOW 6" (150) 6" (150) STAPLES TO BE PLACED AT 12" (300) SPACING ACROSS DOMINANT FLOW

CHECK SLOT DETAIL

(AS NEEDED PER PLANS)




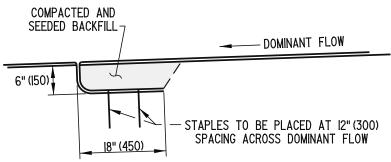


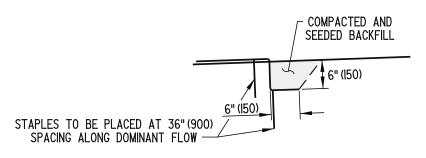


LONGITUDINAL TRENCH ANCHOR DETAIL

OVERLAP DETAIL

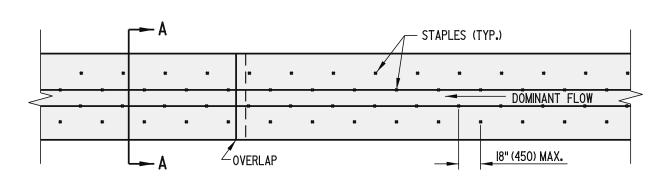

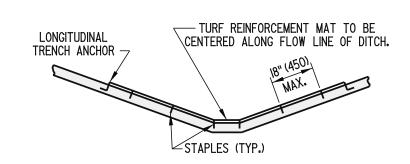




STAPLE DETAIL

STABILIZATION OF DITCHES **PLAN**

NOTES: I. ADDITIONAL STAPLES NOT SHOWN ARE REQUIRED AT OVERLAPS. ENDS, CHECK SLOTS AND EDGES, SEE APPROPRIATE DETAILS FOR STAPLE PLACEMENT.

- 2. STAPLES ARE TO BE STAGGERED.
- 3. TOPSOIL UNDER TURF REINFORCEMENT MAT IS TO BE TRACKED AND SEEDED.



		DELAWARE		
		DEPARTMENT	OF	TRANSPORTATION

TURF REINFORCEMENT MAT APPLICATIONS STANDARD NO. E-25 (2005) SHT. 1 OF

APPROVED Carolan Wich 12/5/05

CHIEF ENGINEER

DATE RECOMMENDED 2

11/29/05

09/08/2005