



4" x 8" RUNNING BOND PATTERN

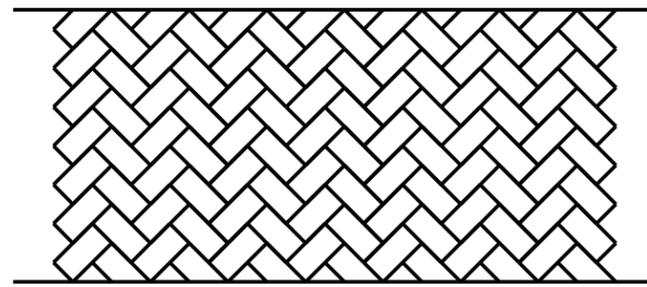

4" x 8" HERRINGBONE PATTERN

NOTES:

1. ACTUAL PATTERN TO BE USED SHALL BE SPECIFIED ON THE PLANS. COLOR IS TO BE "BRICK RED" UNLESS OTHERWISE NOTED ON THE PLANS.
2. MATERIALS AND PAVEMENT BOX VARY DEPENDING ON PLANS.
3. FOR CROSSWALK APPLICATIONS, REFER TO THE DELAWARE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES FOR STRIPING WIDTH.
4. THE PATTERNS ABOVE ARE THE PREFERRED PATTERNS AVAILABLE FOR SIDEWALK OR CROSSWALK APPLICATIONS.

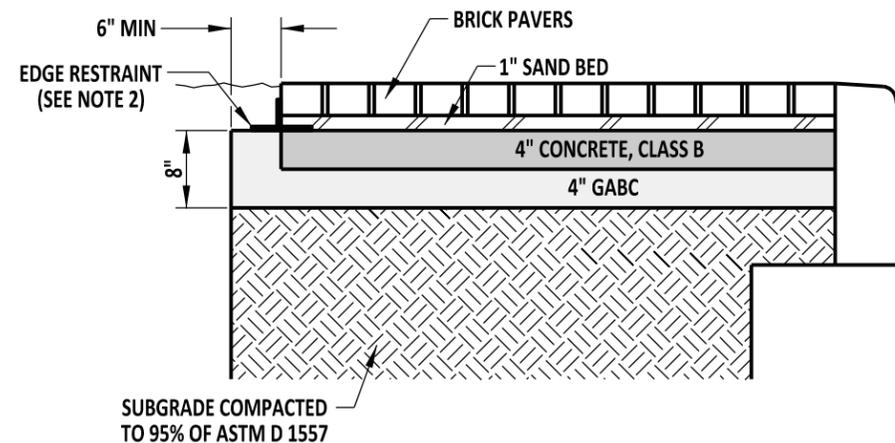

BRICK PAVER SIDEWALK DETAIL

NOTES:

1. WHEN SIDEWALK IS CONFINED BY A RIGID STRUCTURE ON BOTH SIDES, EXPANSION JOINT MATERIAL SHALL BE USED FROM TOP OF BRICK TO BOTTOM OF CONCRETE BASE ON AT LEAST ONE SIDE OF THE SIDEWALK.
2. EDGE RESTRAINT MUST BE APPROVED BY THE ENGINEER IN THE FIELD AND SHALL BE INSTALLED AS PER MANUFACTURER'S RECOMMENDATIONS.



**DELAWARE
DEPARTMENT OF TRANSPORTATION**

PATTERNED HOT-MIX OR CONCRETE & BRICK PAVER DETAILS

STANDARD NO. M-6 (2011)

SHT. 1 OF 1

APPROVED

SIGNATURE ON FILE
CHIEF ENGINEER

01/17/2012
DATE

RECOMMENDED

SIGNATURE ON FILE
DESIGN ENGINEER

01/17/2012
DATE