


LEGEND


- (A) ITEM 401042 - BITUMINOUS CONCRETE, SUPERPAVE, TYPE C, 160 GYRATIONS, PG 70-22 (NON-CARBONATE STONE)
- (B) ITEM 401012 - BITUMINOUS CONCRETE, SUPERPAVE, TYPE B, 160 GYRATIONS, PG 70-22
- (C) ITEM 401019 - BITUMINOUS CONCRETE, SUPERPAVE, BITUMINOUS CONCRETE BASE COURSE, 115 GYRATIONS, PG 64-22
- (D) ITEM 301001 - GRADED AGGREGATE BASE COURSE, TYPE B
- (E) ITEM 908004 - TOPSOIL, 6" DEPTH
ITEM 908014 - PERMANENT GRASS SEEDING, DRY GROUND
- (F) ITEM 209006 - BORROW, TYPE F
- (G) ITEM 908020 - EROSION CONTROL BLANKET MULCH (8' WIDTH MIN.)
- (H) ITEM 760010 - PAVEMENT MILLING, BITUMINOUS CONCRETE PAVEMENT
- (I) SAFETY EDGE FOR ROADWAY PAVEMENT
- (J) ITEM 701016 - I.P.C.C. CURB AND GUTTER, TYPE 1-4 OVER 4" OF GABC, TYPE B
- (K) ITEM 908004 - TOPSOIL, 6" DEPTH
ITEM 908021 - TURF REINFORCEMENT MAT, TYPE 1
ITEM 908014 - PERMANENT GRASS SEEDING, DRY GROUND
- (L) ITEM 720021 - GALVANIZED STEEL BEAM GUARDRAIL
- (M) ITEM 701011 - P.C.C. CURB, TYPE 1-4 OVER 4" OF GABC, TYPE B
- (N) ITEM 401034 - BITUMINOUS CONCRETE, SUPERPAVE, TYPE C, 160 GYRATIONS, PG 64-22, WEDGE
- (O) ITEM 705001 - P.C.C. SIDEWALK, 4" OVER 4" OF GABC, TYPE B
- (P) ITEM 701023 - I.P.C.C. CURB AND GUTTER, TYPE 3-8 OVER 4" OF GABC, TYPE B
- (Q) ITEM 401026 - BITUMINOUS CONCRETE, SUPERPAVE, TYPE C, 160 GYRATIONS, PG 64-22, PATCHING
- (R) ITEM 301002 - GRADED AGGREGATE BASE COURSE, TYPE B, PATCHING
- (S) ITEM 709001 - PERFORATED PIPE UNDERDRAIN, 6"

MATERIAL	LIFT THICKNESS	
	MINIMUM	MAXIMUM
BITUMINOUS CONCRETE, TYPE 'C'	1.25"	2"
BITUMINOUS CONCRETE, TYPE 'B'	2.25"	4"
BITUMINOUS CONCRETE BASE COURSE	3"	6"
GRADED AGGREGATE BASE COURSE	4"	8"

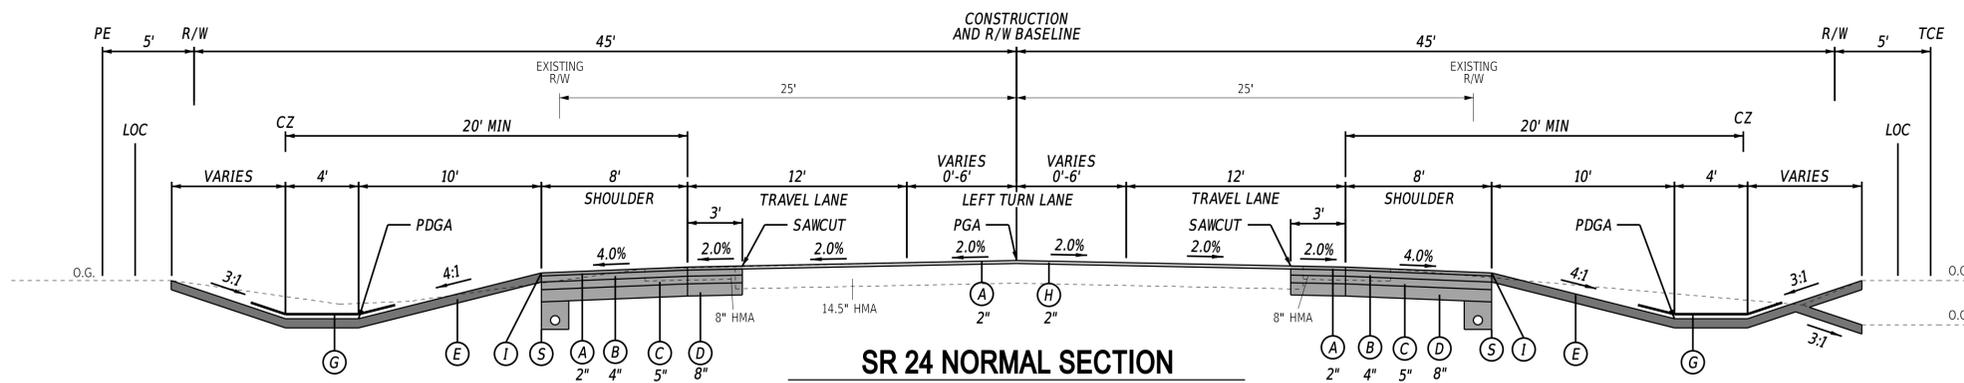


SR 24 NORMAL SECTION

STATION 100+50 TO STATION 109+15
STATION 111+60 TO STATION 120+70

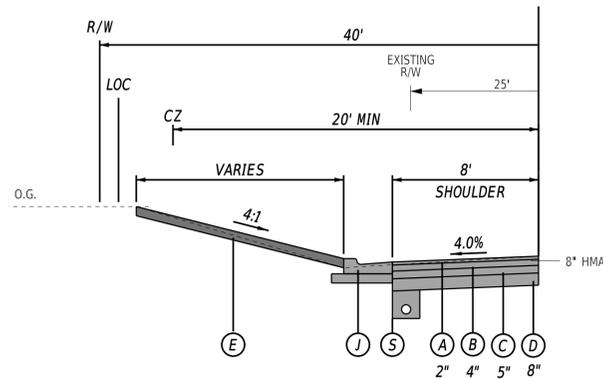


SHOULDER WITH CURB

STATION 100+50 TO STATION 109+15

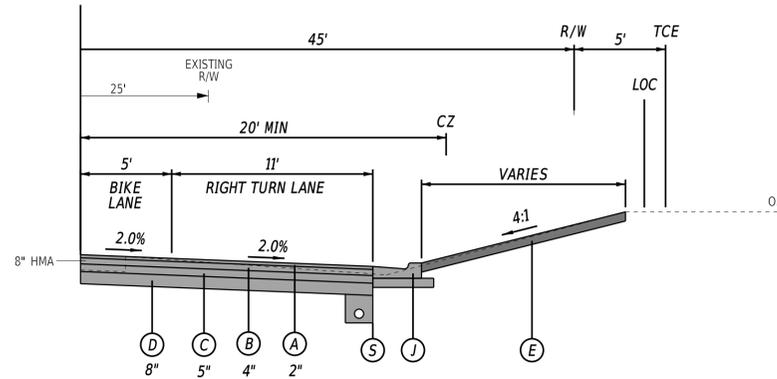


RIGHT TURN LANE

STATION 105+00 TO STATION 109+15

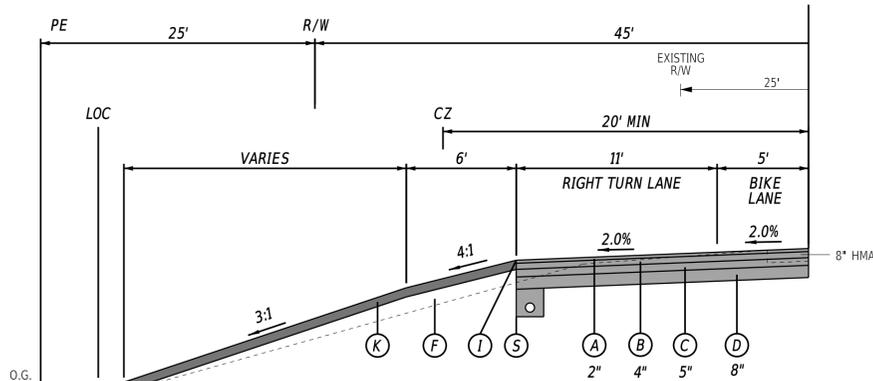


RIGHT TURN LANE

STATION 111+60 TO STATION 114+50

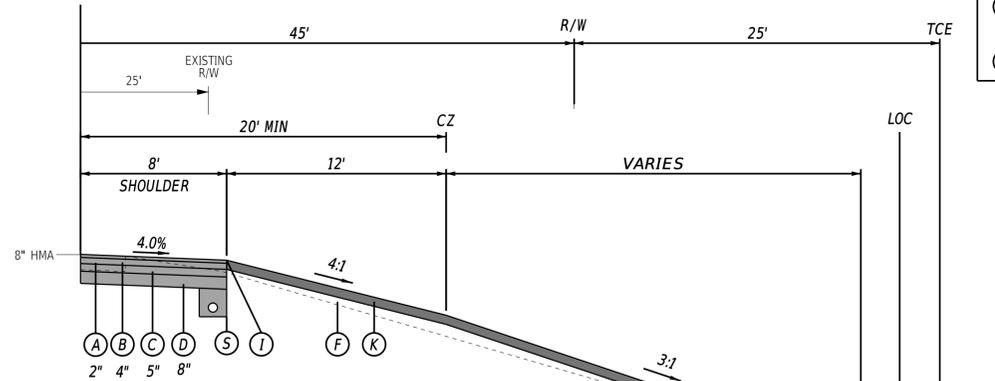

SHOULDER WITHOUT DITCH

STATION 111+60 TO STATION 112+75

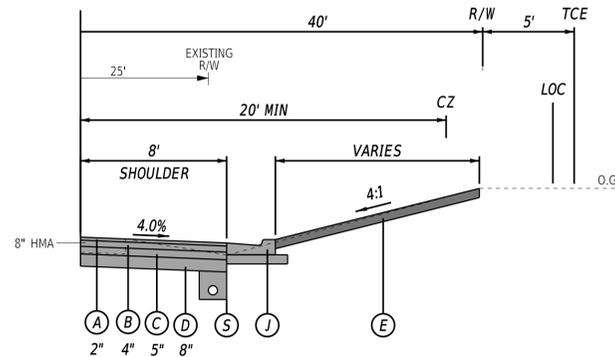

SHOULDER WITH CURB

STATION 100+50 TO STATION 105+00

DISCLAIMER:
THIS EXAMPLE PLAN SET IS INTENDED TO BE A GUIDELINE FOR PREPARING A SET OF PLANS AND BASIC GUIDANCE FOR THE GENERAL APPEARANCE OF A SET OF PLANS. IT IS NOT INTENDED TO BE A SET OF CADD STANDARDS OR TO PROVIDE DESIGN GUIDANCE. PLEASE REFER TO THE DESIGN RESOURCE CENTER (DRC) FOR THE LATEST CADD UPDATES AND VARIOUS OTHER DOCUMENTS FOR DESIGN GUIDANCE.

ADDENDA / REVISIONS

NOT TO SCALE

**HSIP SC, SR24 AT CAMP
ARROW HEAD ROAD AND
SR24 AT ANGOLA ROAD**

CONTRACT	BRIDGE NO.	N/A
T201200902	DESIGNED BY:	W. NAUMAN
COUNTY	CHECKED BY:	C. ESHAM
SUSSEX		


TYPICAL SECTIONS

SECTION
PD
SHEET NO.
7

LEGEND


- (A) ITEM 401042 - BITUMINOUS CONCRETE, SUPERPAVE, TYPE C, 160 GYRATIONS, PG 70-22 (NON-CARBONATE STONE)
- (B) ITEM 401012 - BITUMINOUS CONCRETE, SUPERPAVE, TYPE B, 160 GYRATIONS, PG 70-22
- (C) ITEM 401019 - BITUMINOUS CONCRETE, SUPERPAVE, BITUMINOUS CONCRETE BASE COURSE, 115 GYRATIONS, PG 64-22
- (D) ITEM 301001 - GRADED AGGREGATE BASE COURSE, TYPE B
- (E) ITEM 908004 - TOPSOIL, 6" DEPTH
ITEM 908014 - PERMANENT GRASS SEEDING, DRY GROUND
- (F) ITEM 209006 - BORROW, TYPE F
- (G) ITEM 908020 - EROSION CONTROL BLANKET MULCH (8' WIDTH MIN.)
- (H) ITEM 760010 - PAVEMENT MILLING, BITUMINOUS CONCRETE PAVEMENT
- (I) SAFETY EDGE FOR ROADWAY PAVEMENT
- (J) ITEM 701016 - I.P.C.C. CURB AND GUTTER, TYPE 1-4 OVER 4" OF GABC, TYPE B
- (K) ITEM 908004 - TOPSOIL, 6" DEPTH
ITEM 908021 - TURF REINFORCEMENT MAT, TYPE 1
ITEM 908014 - PERMANENT GRASS SEEDING, DRY GROUND
- (L) ITEM 720021 - GALVANIZED STEEL BEAM GUARDRAIL
- (M) ITEM 701011 - P.C.C. CURB, TYPE 1-4 OVER 4" OF GABC, TYPE B
- (N) ITEM 401034 - BITUMINOUS CONCRETE, SUPERPAVE, TYPE C, 160 GYRATIONS, PG 64-22, WEDGE
- (O) ITEM 705001 - P.C.C. SIDEWALK, 4" OVER 4" OF GABC, TYPE B
- (P) ITEM 701023 - I.P.C.C. CURB AND GUTTER, TYPE 3-8 OVER 4" OF GABC, TYPE B
- (Q) ITEM 401026 - BITUMINOUS CONCRETE, SUPERPAVE, TYPE C, 160 GYRATIONS, PG 64-22, PATCHING
- (R) ITEM 301002 - GRADED AGGREGATE BASE COURSE, TYPE B, PATCHING
- (S) ITEM 709001 - PERFORATED PIPE UNDERDRAIN, 6"

MATERIAL	LIFT THICKNESS	
	MINIMUM	MAXIMUM
BITUMINOUS CONCRETE, TYPE 'C'	1.25"	2"
BITUMINOUS CONCRETE, TYPE 'B'	2.25"	4"
BITUMINOUS CONCRETE BASE COURSE	3"	6"
GRADED AGGREGATE BASE COURSE	4"	8"

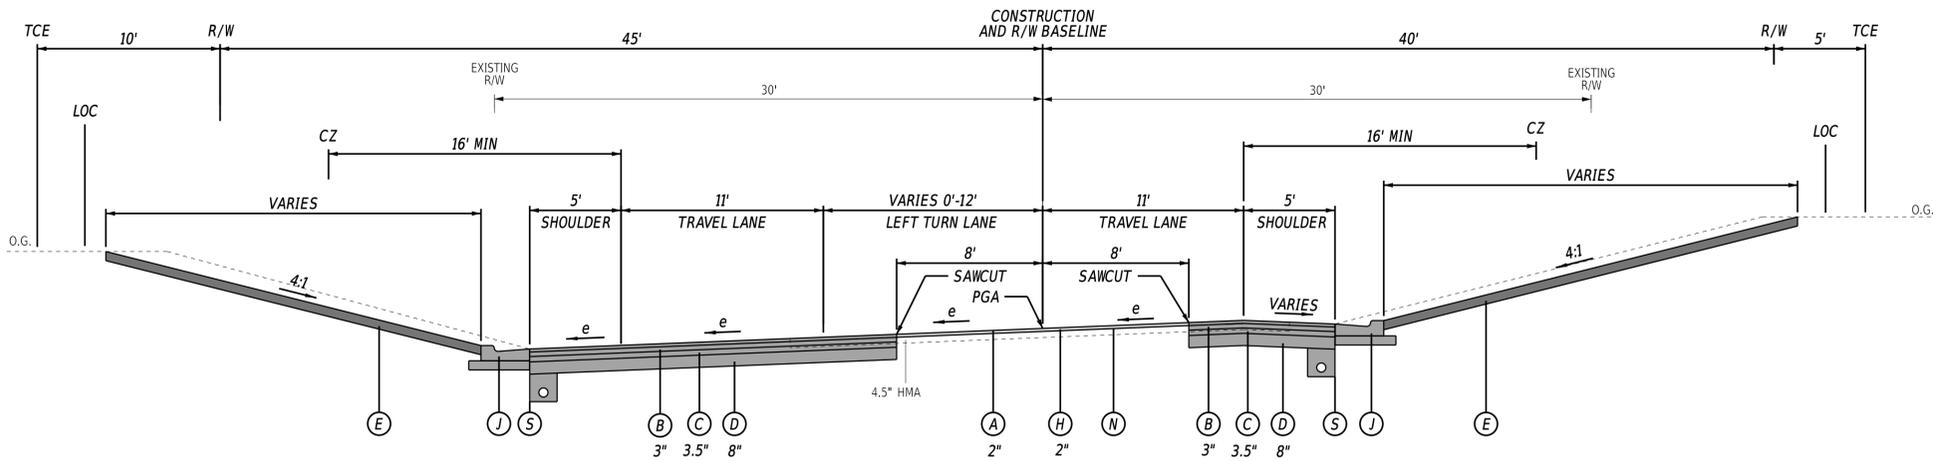


ANGOLA ROAD SUPERELEVATION SECTION

STATION 206+50 TO STATION 215+25

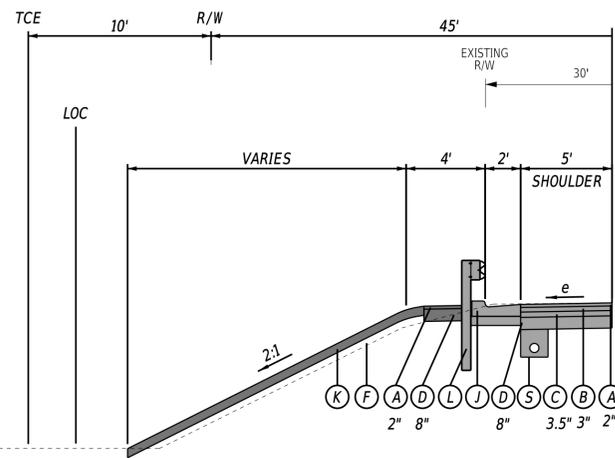


SHOULDER WITH GUARDRAIL

STATION 209+00 TO STATION 212+50

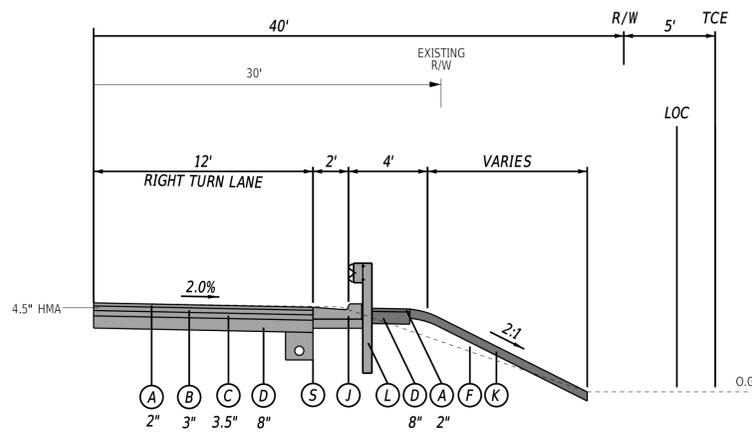

RIGHT TURN LANE WITH GUARDRAIL

STATION 212+00 TO STATION 214+00

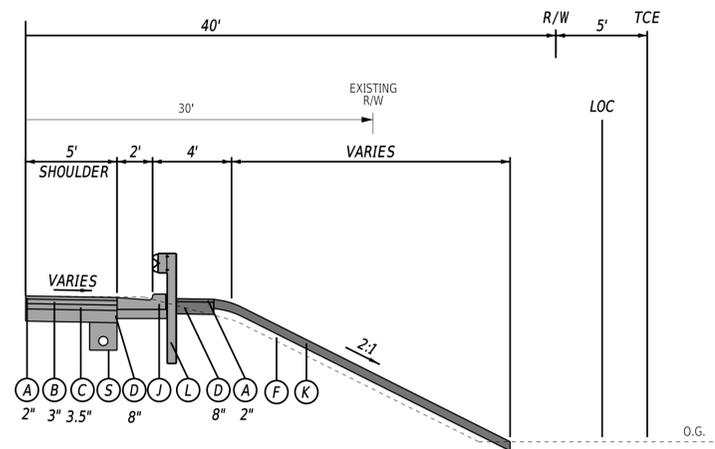

SHOULDER WITH GUARDRAIL

STATION 210+25 TO STATION 212+00

DISCLAIMER:
THIS EXAMPLE PLAN SET IS INTENDED TO BE A GUIDELINE FOR PREPARING A SET OF PLANS AND BASIC GUIDANCE FOR THE GENERAL APPEARANCE OF A SET OF PLANS. IT IS NOT INTENDED TO BE A SET OF CADD STANDARDS OR TO PROVIDE DESIGN GUIDANCE. PLEASE REFER TO THE DESIGN RESOURCE CENTER (DRC) FOR THE LATEST CADD UPDATES AND VARIOUS OTHER DOCUMENTS FOR DESIGN GUIDANCE.

ADDENDA / REVISIONS

NOT TO SCALE

**HSIP SC, SR24 AT CAMP
ARROW HEAD ROAD AND
SR24 AT ANGOLA ROAD**

CONTRACT	BRIDGE NO.	N/A
T201200902	DESIGNED BY:	W. NAUMAN
COUNTY	CHECKED BY:	C. ESHAM
SUSSEX		

TYPICAL SECTIONS

SECTION
PD
SHEET NO.
8