



STATE OF GOOD REPAIR

SOGR for overhead sign & high mast lighting structures is defined using the minimum assigned Condition Rating. The Condition Rating assignment mirrors the NBIS Condition Rating System and defines SOGR as follows:

Overhead Sign/High Mast Lighting Program

Good Condition: NBI Rating ≥ 6

Poor Condition: NBI Rating ≤ 4



TARGETS AND MEASURES

DelDOT has not identified specific performance goals for its overhead sign & high mast lighting program in the past. Moving forward, DelDOT plans to mirror the bridge performance goals until a more comprehensive sign structure modeling database is developed and implemented.

DelDOT Performance Goals

of Structures in Good Condition $> 75\%$

of Structures in Poor Condition $< 3\%$

OVERHEAD SIGN & HIGH MAST LIGHTING STRUCTURES

Description:

Overhead sign structures consist of any structure supporting signage or toll sensors that span partially or fully over a public roadway. High mast lighting structures include all highway / rest stop lighting and CCTV camera structures with a height greater than 60'. Inspection of overhead sign and high mast lighting structures is not mandated or regulated by the FHWA. DelDOT has a routine inspection program for ensuring that these structures are structurally safe.

Annual Budget:

DelDOT spent \$5.94M in FY24 on sign structure replacement. The expected average annual budget for the next 10 fiscal years is \$2.68 million/year. This is based on current planned sign structure replacement projects and includes a combination of State and Federal funding.

Asset Valuation:

The average replacement cost is used to derive the Asset Valuation.

High Mast Lighting Cost:

- \$175,000/structure
- 236 Structures
- Total Valuation = \$41.3M

Sign: Bridge Mounted Cost:

- \$70,000/structure
- 37 Structures
- Total Valuation = \$2.6M

Sign: Cantilevered Cost:

- \$205,000/structure
- 170 Structures
- Total Valuation = \$34.85M

Sign: Overhead Cost:

- \$340,000/structure
- 226 Structures
- Total Valuation = \$76.84M

Total Asset Valuation: \$155.6M

INVENTORY & CONDITION

2024 DelDOT Overhead Sign & High Mast Lighting Structure Condition Rating Summary

Condition Rating	All Structures		Sign: Overhead		Sign: Cantilevered		Sign: Bridge Mounted		High Mast Lighting	
	# of Structures	% of Structures	# of Structures	% of Structures	# of Structures	% of Structures	# of Structures	% of Structures	# of Structures	% of Structures
Poor (≤ 4)	9	1.3%	4	1.8%	4	2.4%	0	0.0%	1	0.4%
Fair = 5	124	18.6%	65	28.8%	35	20.6%	1	2.7%	23	9.7%
Good (≥ 6)	534	80.1%	157	69.5%	136	77.1%	36	97.3%	212	89.8%
Total =	667	100%	226	100%	170	100%	37	100%	236	100%

SIGN STRUCTURE PROGRAM PROGRESS

2001: Sign inspection program initiated

2006: Sign prioritization process established

2007: Sign structure maintenance program started

2008: Critical Sign Structure Replacement program started

2015: DelDOT Sign structure Design Guidance established

2020: Sign Structure Performance Measures established


2021: State of Good repair document developed

Current Work: Move database over to AASHTOWare BrM Program and Develop Modeling & Forecasting Functionality



HISTORICAL PERFORMANCE TRENDS & FORECASTED PERFORMANCE PROJECTIONS

*Note: The 10-Year Condition Forecast is based on current programmed overhead sign & high mast lighting replacement projects.

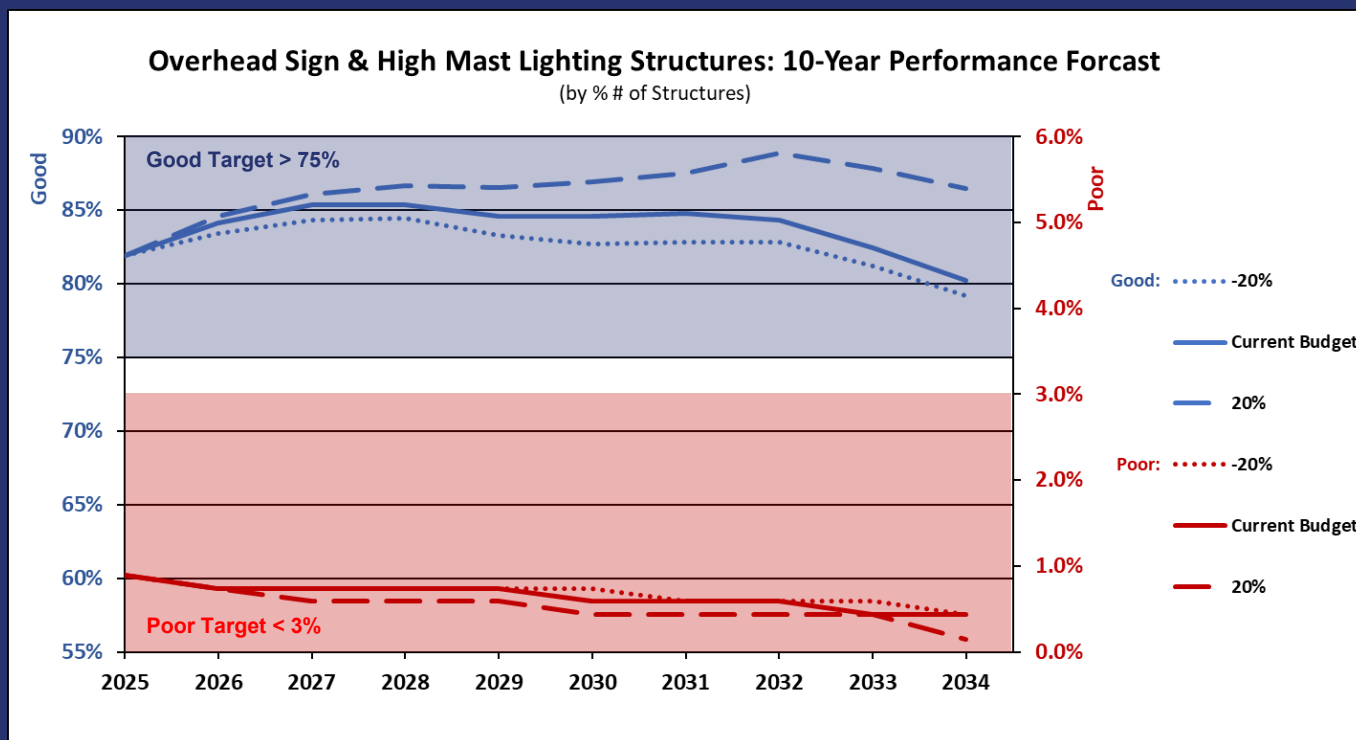

POTENTIAL RISKS

Fatigue Prone Details: Overhead sign & high mast lighting structures are built from steel and often contain welded connections that are problematic. As a result, these structures are more likely to develop cracks that could potentially propagate and, if not inspected frequently, could result in a failure of the structure. The controlling force acting on these structures is wind load, which is a dynamic type of load.

4-Bolt Cantilever Structures: Many older cantilevered sign structures consist of a 4-anchor bolt pattern that secures the structure to the concrete foundation. Due to the lack of redundancy with only having four bolts, these structures are more prone to bolt failure and DelDOT has been working to replace with newer structures that contain a minimum of 6 anchor bolts. These structures have the anchor bolts Ultrasonically tested every year to help minimize the risk. There are currently 11 structures left with 8 of them currently planned for replacement.

Traffic Impact: Overheight trucks that strike overhead sign structures are a concern for the structural integrity of the sign structure, as well as, safety for motorists driving under the structure. In addition, since the base and foundation for overhead sign structures are typically adjacent to the roadway shoulders or located just behind the guardrail limits, these structures are prone to impact damage from vehicular accidents along the roadway.