

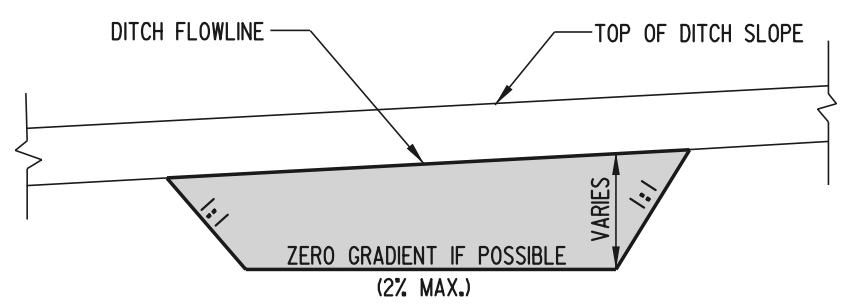


SCALE : N.T.S.

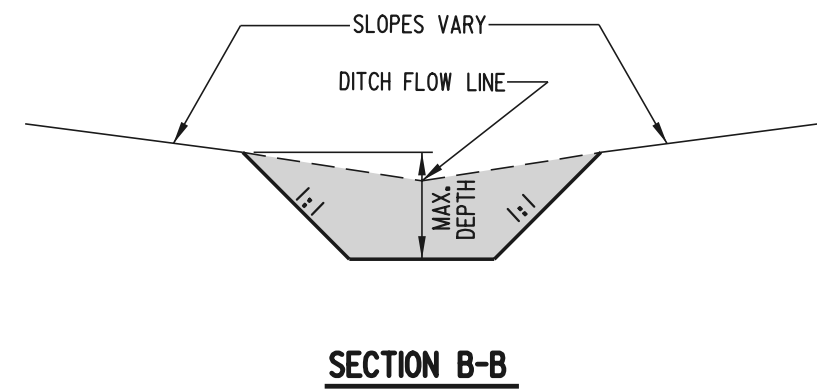

- NOTES:**
- 1). SEDIMENT TRAPS ARE INTENDED FOR USE IN EXISTING, PROPOSED, AND AS SHOWN ON PLANS OR AS DIRECTED BY THE ENGINEER.
 - 2). SIDE SLOPES SHALL BE STABILIZED WITH SEED AND STRAW MULCH.
 - 3). AN OUTLET STRUCTURE IS REQUIRED. STONE CHECK DAMS, PERFORATED RISER PIPES, OR DRAINAGE INLETS MAY BE USED. SEE APPROPRIATE STANDARD SHEET FOR ADDITIONAL INFORMATION.
 - 4). FOR SIZE, LOCATION, ETC. OF SEDIMENT TRAP, SEE CONSTRUCTION PHASING, M.O.T., AND EROSION CONTROL PLANS.
 - 5). ALL FILL SLOPES SHALL BE 2:1.
 - 6). A 2:1 LENGTH TO WIDTH RATIO SHOULD BE ACHIEVED WHERE POSSIBLE. IF THIS IS NOT POSSIBLE, THE USE OF BAFFLES OR OTHER SPECIAL DESIGNS SHOULD BE INCORPORATED TO INCREASE FLOW TIME.

PLAN SYMBOL

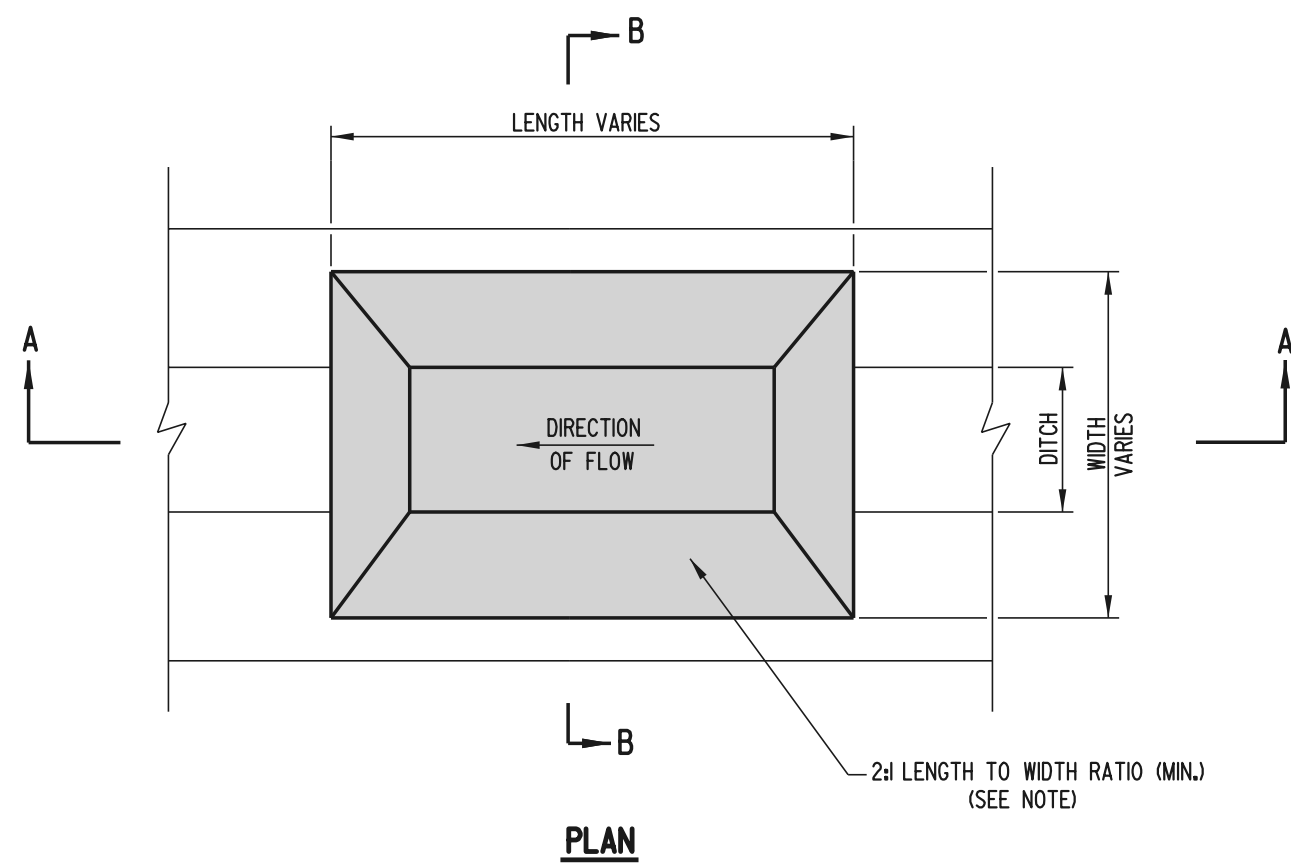