


**INITIAL TRENCH ANCHOR DETAIL**  
APPLIED AT THE DOWNSTREAM END OF DITCH


**STABILIZATION OF EMBANKMENTS**

**NOTES:**


2. TOPSOIL UNDER EROSION CONTROL BLANKET IS TO BE TRACKED AND SEEDED.
3. WHEN OFFSITE RUNOFF OCCURS, ADDITIONAL MEASURES AS DIRECTED BY THE ENGINEER SHALL BE USED TO ENSURE STABILITY OF EMBANKMENT.

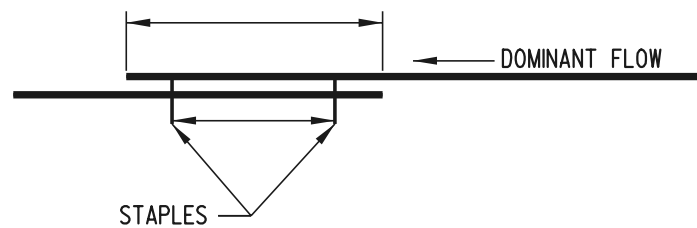

**OVERLAP DETAIL**

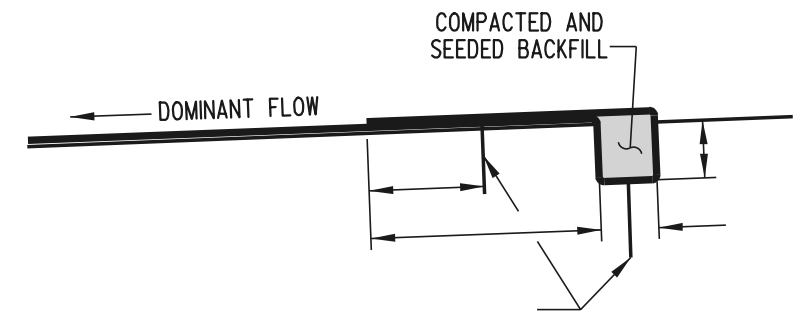


**TERMINAL TRENCH ANCHOR DETAIL**  
APPLIED AT THE UPSTREAM END OF DITCH

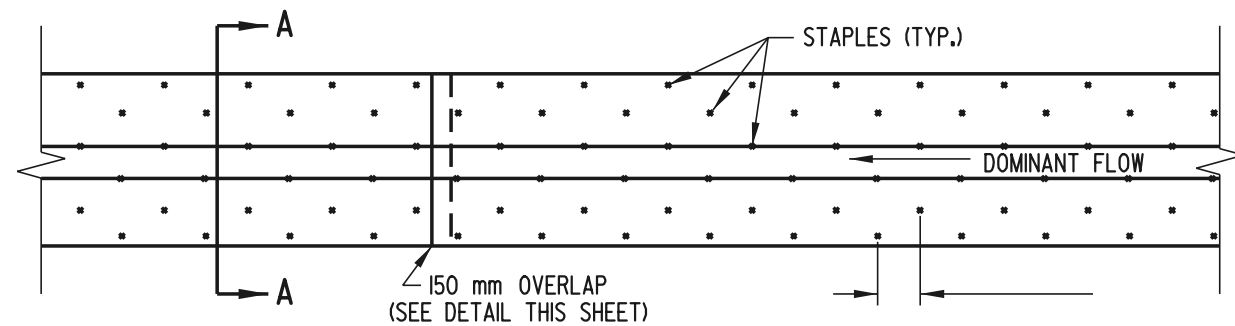

**STABILIZATION OF DITCHES**  
**PLAN**


- NOTES:**
1. ADDITIONAL STAPLES NOT SHOWN ARE REQUIRED AT OVERLAPS. SEE OVERLAP DETAIL FOR STAPLE PLACEMENT.
  2. STAPLES ARE TO BE STAGGERED.
  3. TOPSOIL UNDER EROSION CONTROL BLANKET IS TO BE TRACKED AND SEEDED.

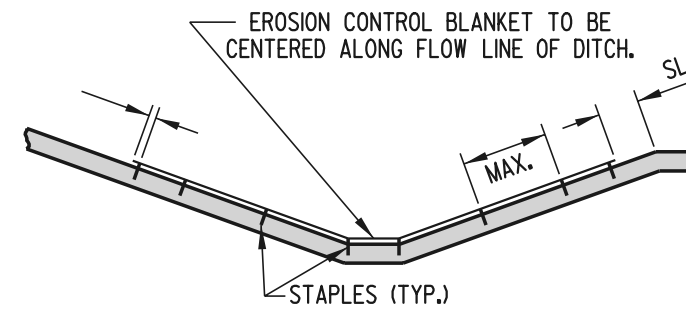

**STABILIZATION OF DITCHES**  
**SECTION A-A**

STAPLES ALONG LONGITUDINAL EDGES SHALL BE SPACED AS FOLLOWS:  
450 mm WHEN SL ≤ 6000 mm  
225 mm WHEN SL > 6000 mm

**PLAN SYMBOL**



**DELAWARE**  
**DEPARTMENT OF TRANSPORTATION**

**EROSION CONTROL BLANKET APPLICATIONS**

STANDARD NO. **E-9 (2000)** SHT. **1** OF **1**

**APPROVED**

\_\_\_\_\_  
CHIEF ENGINEER DATE

**RECOMMENDED**

\_\_\_\_\_  
DESIGN ENGINEER DATE