



**PLAN**

- NOTES:**
- 1). THE PORTABLE SEDIMENT TANK SHOWN MAY BE USED IN SITES WHERE SPACE IS LIMITED TO CONSTRUCT A DEWATERING BASIN.
  - 2). THE MAXIMUM PUMP DISCHARGE INTO THIS TYPICAL PORTABLE SEDIMENT TANK SHALL BE 425 GALLONS PER MINUTE (26 LITERS PER SECOND). THE FILTER FABRIC SHALL BE REPLACED WHEN THE PORTABLE SEDIMENT TANK CAN NO LONGER ALLOW THIS FLOW RATE, WHEN THERE IS A TEAR, OR WHEN DIRECTED BY THE ENGINEER.
  - 3). SEVERAL UN-CONNECTED OR CONNECTED IN PARALLEL PORTABLE SEDIMENT TANKS MAY BE USED WHEN A HIGHER FLOW RATE IS NEEDED TO DE-WATER THE JOB.
  - 4). OTHER DESIGNS MAY BE USED PROVIDED THE HYDRAULIC DESIGN IS SUBMITTED TO AND APPROVED BY THE STORMWATER ENGINEER.

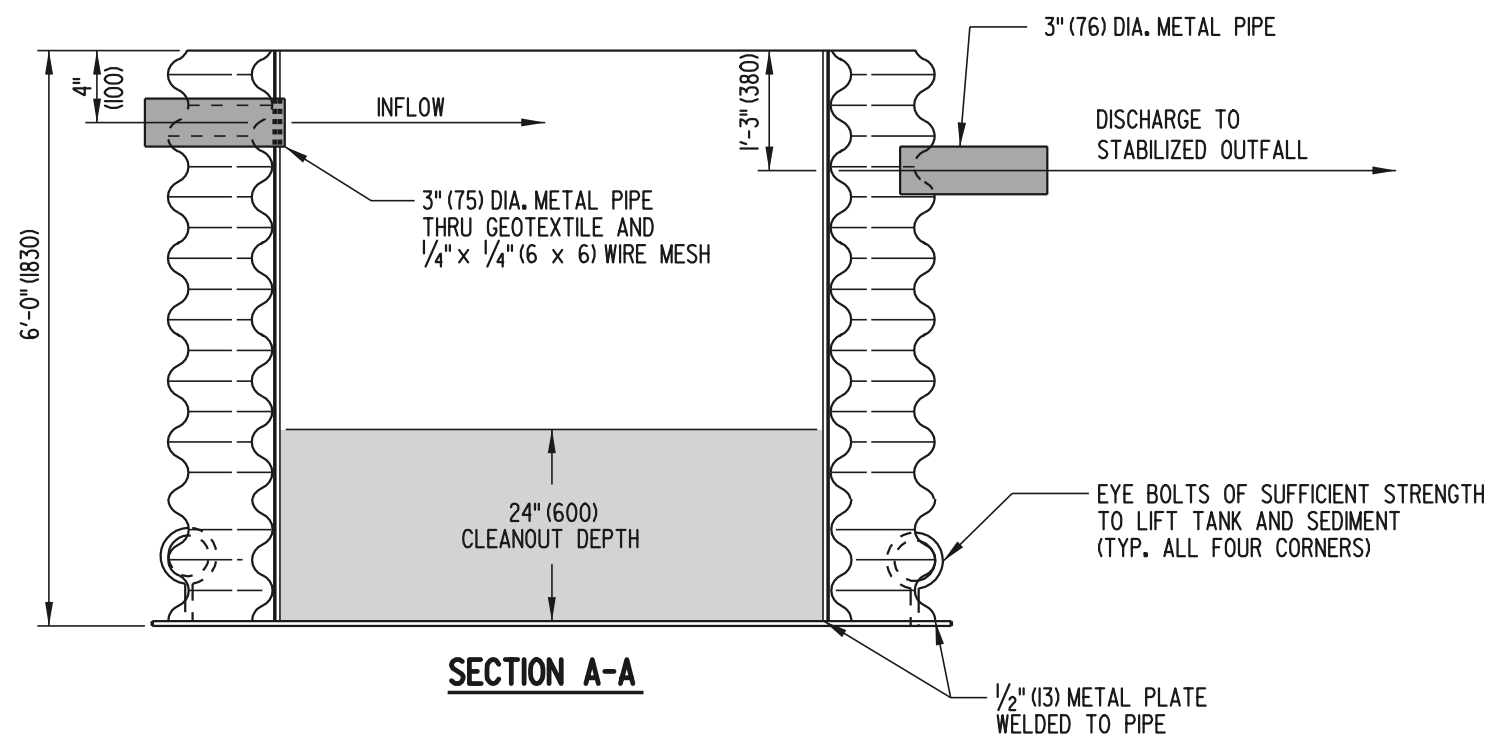

**SECTION A-A**

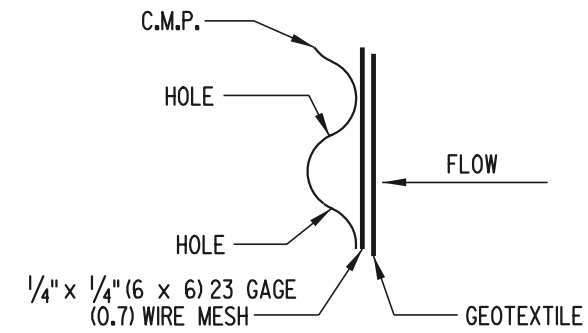

**SECTION B-B**

**PLAN SYMBOL**



**DELAWARE  
DEPARTMENT OF TRANSPORTATION**

**PORTABLE SEDIMENT TANK**

STANDARD NO. **E-24 (2001)** SHT. **1** OF **1**

APPROVED *Ryan M. Harkins* 6/18/01  
CHIEF ENGINEER DATE  
 RECOMMENDED *Michael R. [Signature]* 6/18/01  
DESIGN ENGINEER DATE