


TYPICAL SECTION (BASES 5 AND 6)

POLE BASE DATA CHART				
POLE BASE TYPE *	DIAMETER	DEPTH	*4 (#13) HORIZONTAL REINFORCING BARS	*8 (#25) VERTICAL REINFORCING BARS
1	36" (915)	7' (2150) *	5	8
2	36" (915)	10' (3050) *	6	8
2A	48" (1220)	8' (2450) *	5	8
2B	60" (1525)	7' (2150) *	5	8
3	48" (1220)	10' (3050) *	6	8
3A	60" (1525)	9' (2750) *	6	8
3B	72" (1830)	7' (2150) *	5	8
4	24" (610)	2'-4" (725) *	NONE	NONE
5	36" (915)	4' (1225) *	NONE	NONE
6	24" (610)	6' (1850) *	4	8
7	48" (1220)	13'-4" (4000)*	7	8

*- ADDITIONAL DEPTH FOR EXTENSION, IF REQUIRED, TO BE DETERMINED BY TRAFFIC ENGINEERING AND MANAGEMENT (TEAM) FIELD REPRESENTATIVE.

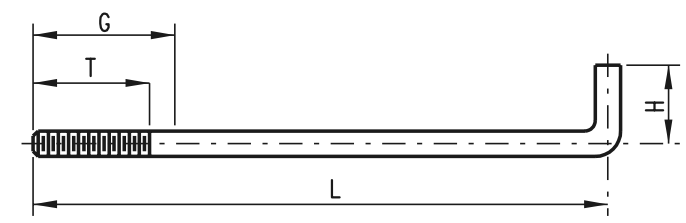

G = GALVANIZED PORTION
 T = THREAD LENGTH
 L = LENGTH OF ROD
 H = HEIGHT OF ROD

NOMINAL BOLT SIZE	L	H	T	G
1" (25) X 40" (1025)	36" (925)	4" (100)	6" (150)	8" (200)
1 1/4" (32) X 48" (1225)	42" (1075)	6" (150)	8" (200)	10" (250)

ANCHOR BOLT DATA CHART AND DETAILS

NOTE: ANCHOR BOLTS FOR POLE BASE TYPE 7 SHALL CONFORM TO THE CCTV POLE MANUFACTURER'S SPECIFICATIONS.

PLAN SYMBOL



<p>DELAWARE DEPARTMENT OF TRANSPORTATION</p>	POLE BASES		<p>APPROVED <i>Ryan M. Harshbarger</i> 6/18/01 <small>CHIEF ENGINEER DATE</small></p>
	<p>STANDARD NO. T-5 (2001)</p>	<p>SHT. 3 OF 3</p>	<p>RECOMMENDED <i>Michael R. [Signature]</i> 6/18/01 <small>DESIGN ENGINEER DATE</small></p>