
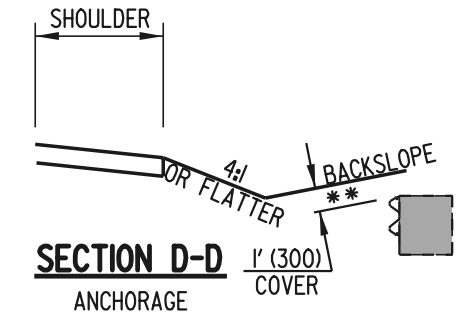
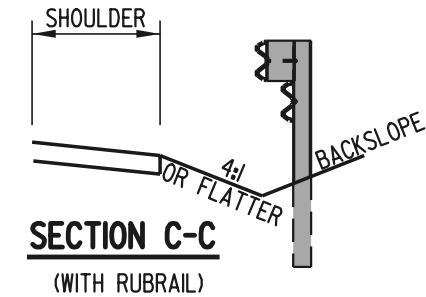
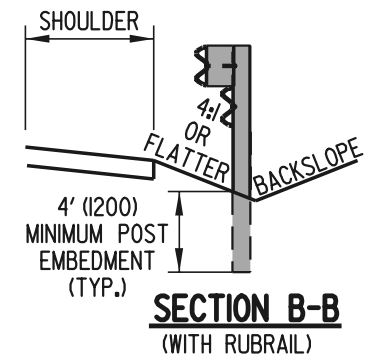


FLARE RATES	
DESIGN SPEED	FLARE RATE
70 MPH (110 km/h)	15:1
60 MPH (100 km/h)	14:1
55 MPH (90 km/h)	12:1
50 MPH (80 km/h)	11:1
45 MPH (70 km/h)	10:1
40 MPH (60 km/h)	9:1
30 MPH (50 km/h)	7:1

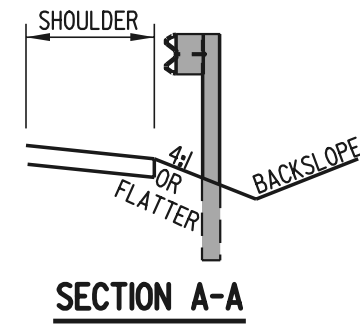

\*\* 1' (300) BURIAL IS NOT REQUIRED WHEN ANCHORING IN ROCK.

- NOTES:**
- 1). BURIED END SECTION PAYMENT INCLUDES THE CONCRETE OR POST ANCHORAGE, EXCAVATION, BACKFILL, AND ALL APPLICABLE ITEMS, INCLUDING LABOR NECESSARY TO COMPLETE END ANCHORAGE.
  - 2). THE CONTRACTOR HAS THE OPTION OF USING EITHER A CONCRETE BLOCK ANCHOR OR A POST ANCHOR TO TERMINATE THE BURIED END SECTION.
  - 3). THE TOP OF THE W-BEAM SHALL BE HELD CONSTANT RELATIVE TO THE ROADWAY PROFILE GRADE UNTIL IT CROSSES THE DITCH FLOW LINE. A SECOND W-BEAM RAIL IS REQUIRED WHEN THE DISTANCE BETWEEN THE GROUND AND THE BOTTOM OF THE TOP RAIL EXCEEDS 18" (450). THE MAXIMUM HEIGHT OF THE DOUBLE RAIL SYSTEM IS 45" (1150). IF NECESSARY, TAPER BOTH RAILS DOWN TO MAINTAIN MAXIMUM HEIGHT. SECOND RAIL SHALL BE PAID FOR AS ADDITIONAL LINEAR FEET (LINEAR METERS) OF TYPE I GUARDRAIL.
  - 4). WHEN USING A SECOND RAIL, 8' (2400) LONG POSTS ARE REQUIRED. BEHIND THE DITCHLINE, POSTS MUST PROVIDE 4' (1200) MINIMUM EMBEDMENT (20" (510) WHEN ROCK IS ENCOUNTERED). POSTS FOR THE POST ANCHOR SHALL BE 6' (1800) LONG.
  - 5). WHEN USING THE BURIED END SECTION, THE DESIGN MUST PROVIDE A MINIMUM OF 75' (23 m) FROM WHERE THE GUARDRAIL CROSSES THE DITCH LINE TO THE BEGINNING OF THE HAZARD.
  - 6). MAINTAIN THE FLARE OF THE GUARDRAIL UNTIL THE 12" (300) COVER HAS BEEN ATTAINED. IF THE 12" (300) COVER CANNOT BE ATTAINED BEFORE THE RAIL IS 7' (2100) BEHIND THE BOTTOM OF THE DITCH, THEN SLOPE THE GUARDRAIL FROM THE POINT WHERE IT CROSSES THE DITCH TO WHERE IT IS 7' (2100) BEHIND THE DITCH, SO THAT IT HAS 12" (300) OF COVER.