



CURB RAMP, TYPE 2
PARALLEL CURB RAMP

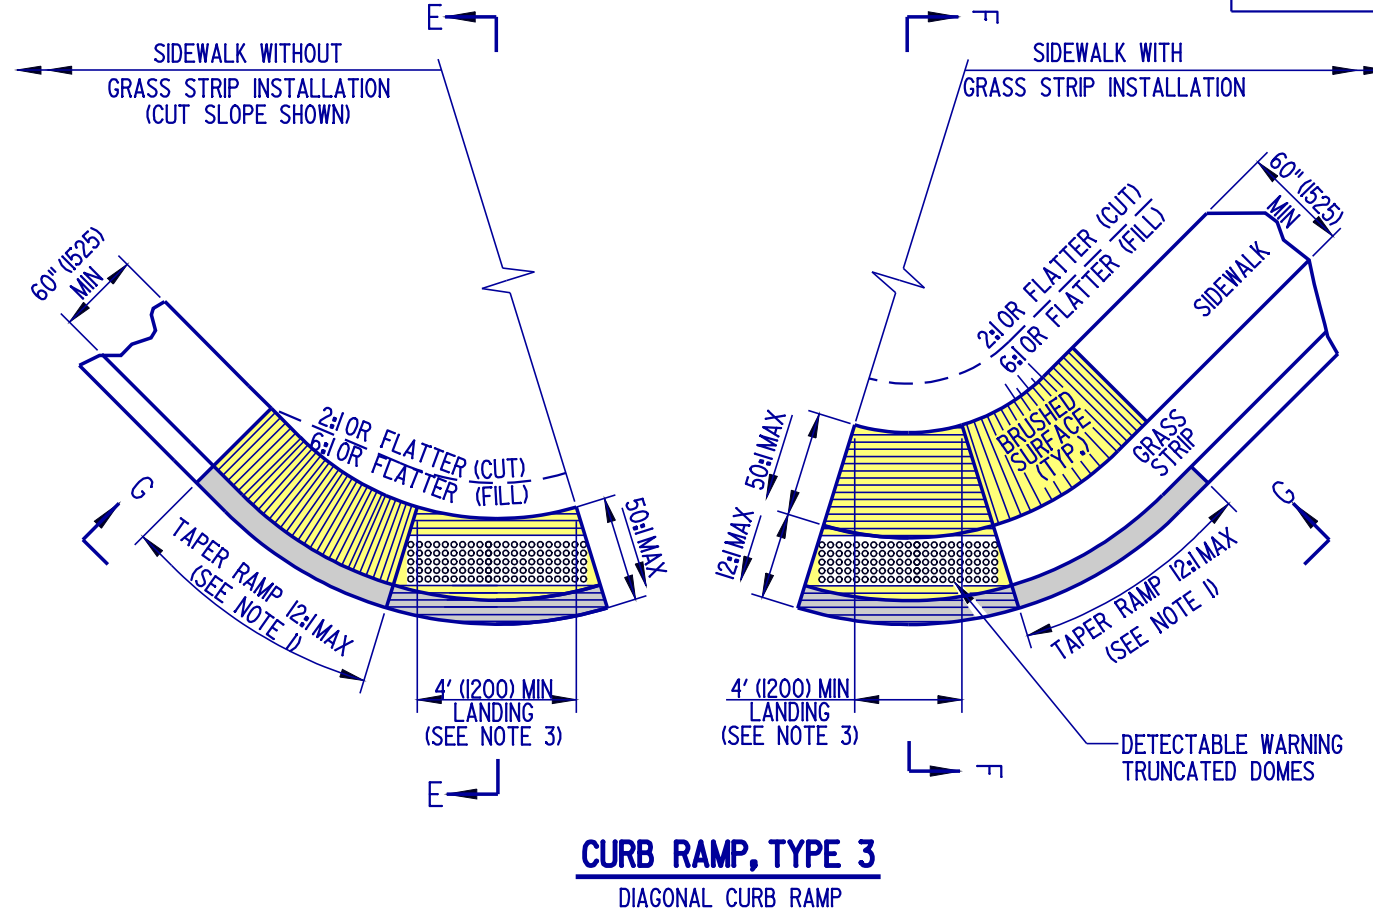

CURB RAMP, TYPE 3
DIAGONAL CURB RAMP

NOTE: THE DIAGONAL CURB RAMP IS NOT THE PREFERRED TREATMENT.

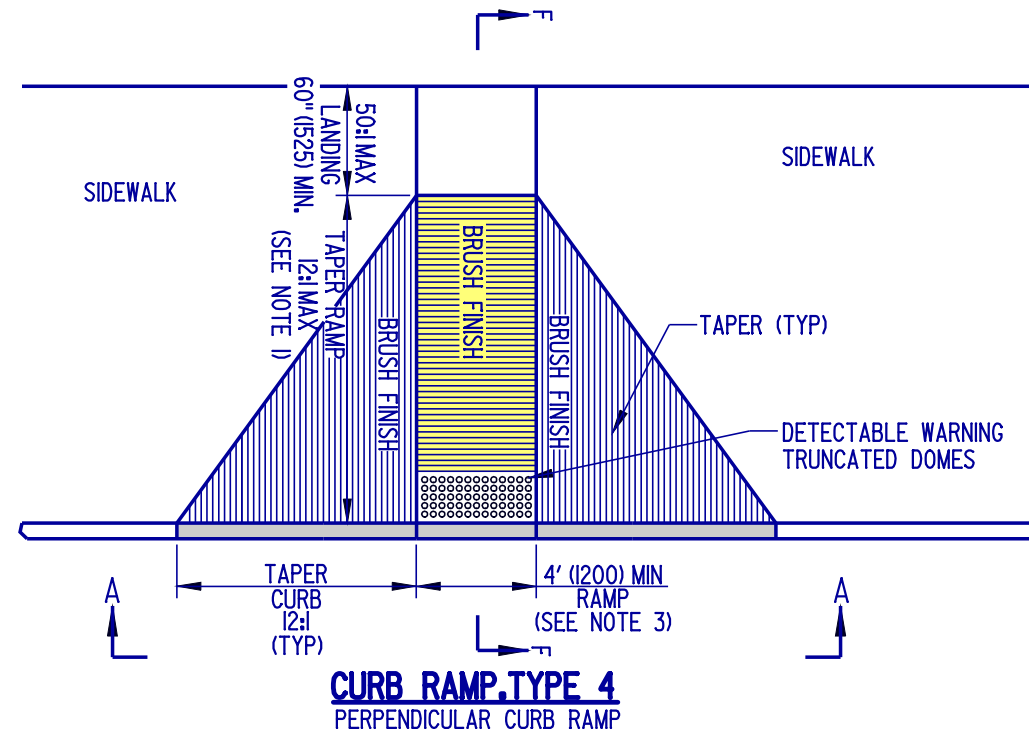

CURB RAMP, TYPE 4
PERPENDICULAR CURB RAMP

- NOTES:**
- 1). WHERE A 12:1 MAXIMUM SLOPE RAMP WILL NOT MEET THE SIDEWALK GRADE WITHIN A LENGTH OF 15' (4570) DUE TO STEEP ADJACENT ROADWAY, THE RAMP LENGTH MAY BE LIMITED TO 15' (4570), AND THE RAMP SLOPE ALLOWED TO EXCEED 12:1.
 - 2). TRANSITION TO EXISTING SIDEWALK WIDTH OVER THE LENGTH OF THE RAMP.
 - 3). RAMP WIDTH SHALL BE 4' (1200) MINIMUM, HOWEVER, 5' (1525) IS PREFERRED.



DELAWARE
DEPARTMENT OF TRANSPORTATION

CURB RAMPS, TYPES 2, 3, & 4
STANDARD NO. C-2 (2004) SHT. 2 OF 4

APPROVED *Carolann Wick* 1/10/05
CHIEF ENGINEER DATE
RECOMMENDED *Dennis M. O'Flaherty* 1/13/05
DESIGN ENGINEER DATE