



SECTION B-B

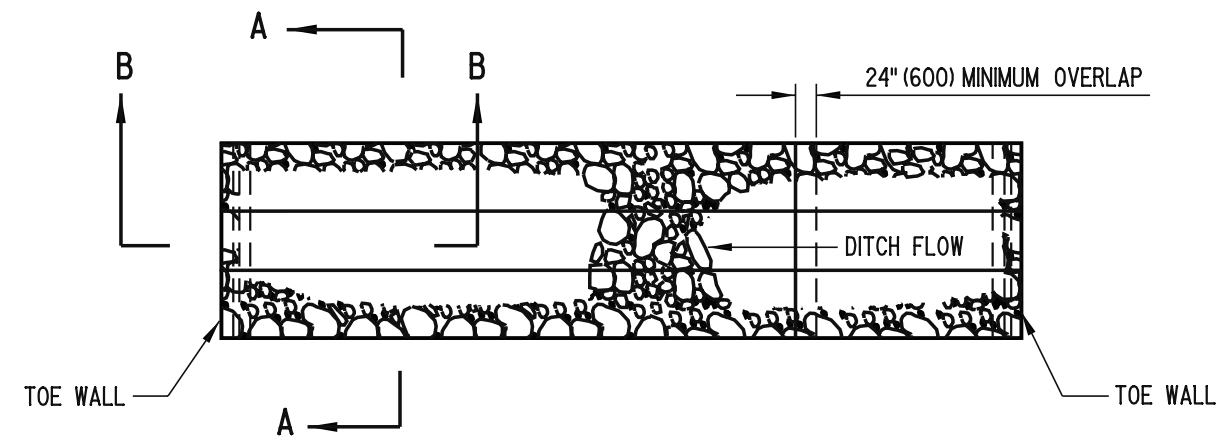

PLAN

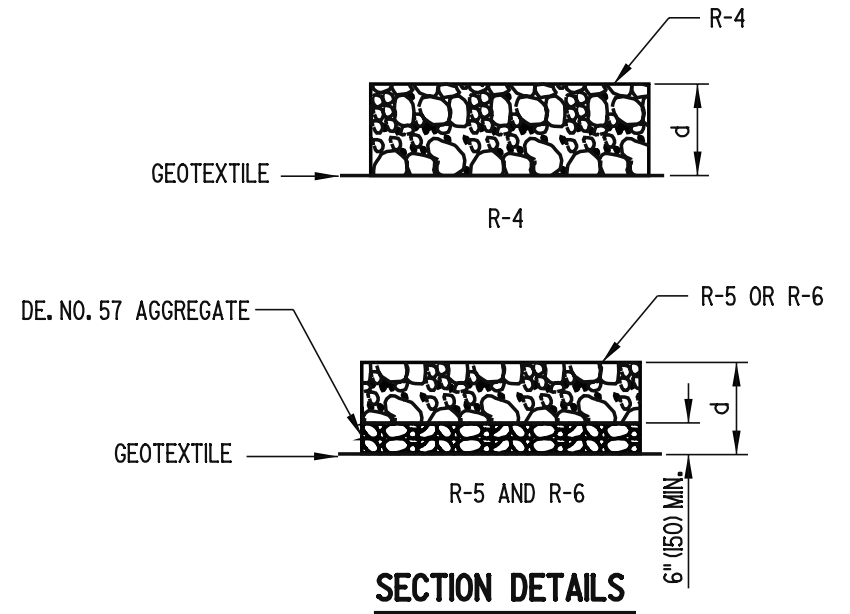

CLASS RIPRAP
 R-4 d = 14" (350) MIN.
 R-5 d = 26" (650) MIN.
 R-6 d = 34" (850) MIN.

SECTION DETAILS

- NOTES:**
- 1). SECURING PINS ARE TO BE PLACED AT LOCATIONS SHOWN AND AT 24" (600) LONGITUDINAL AND LATERAL SPACING.
 - 2). SEE PLANS FOR LOCATION, DIMENSIONS, GRADES, ETC.
 - 3). USE OF R-7 RIPRAP WILL REQUIRE A SEPARATE PROFESSIONAL ENGINEERING DESIGN FOR SIGHT SPECIFIC CONDITIONS.