



SCALE : N.T.S.

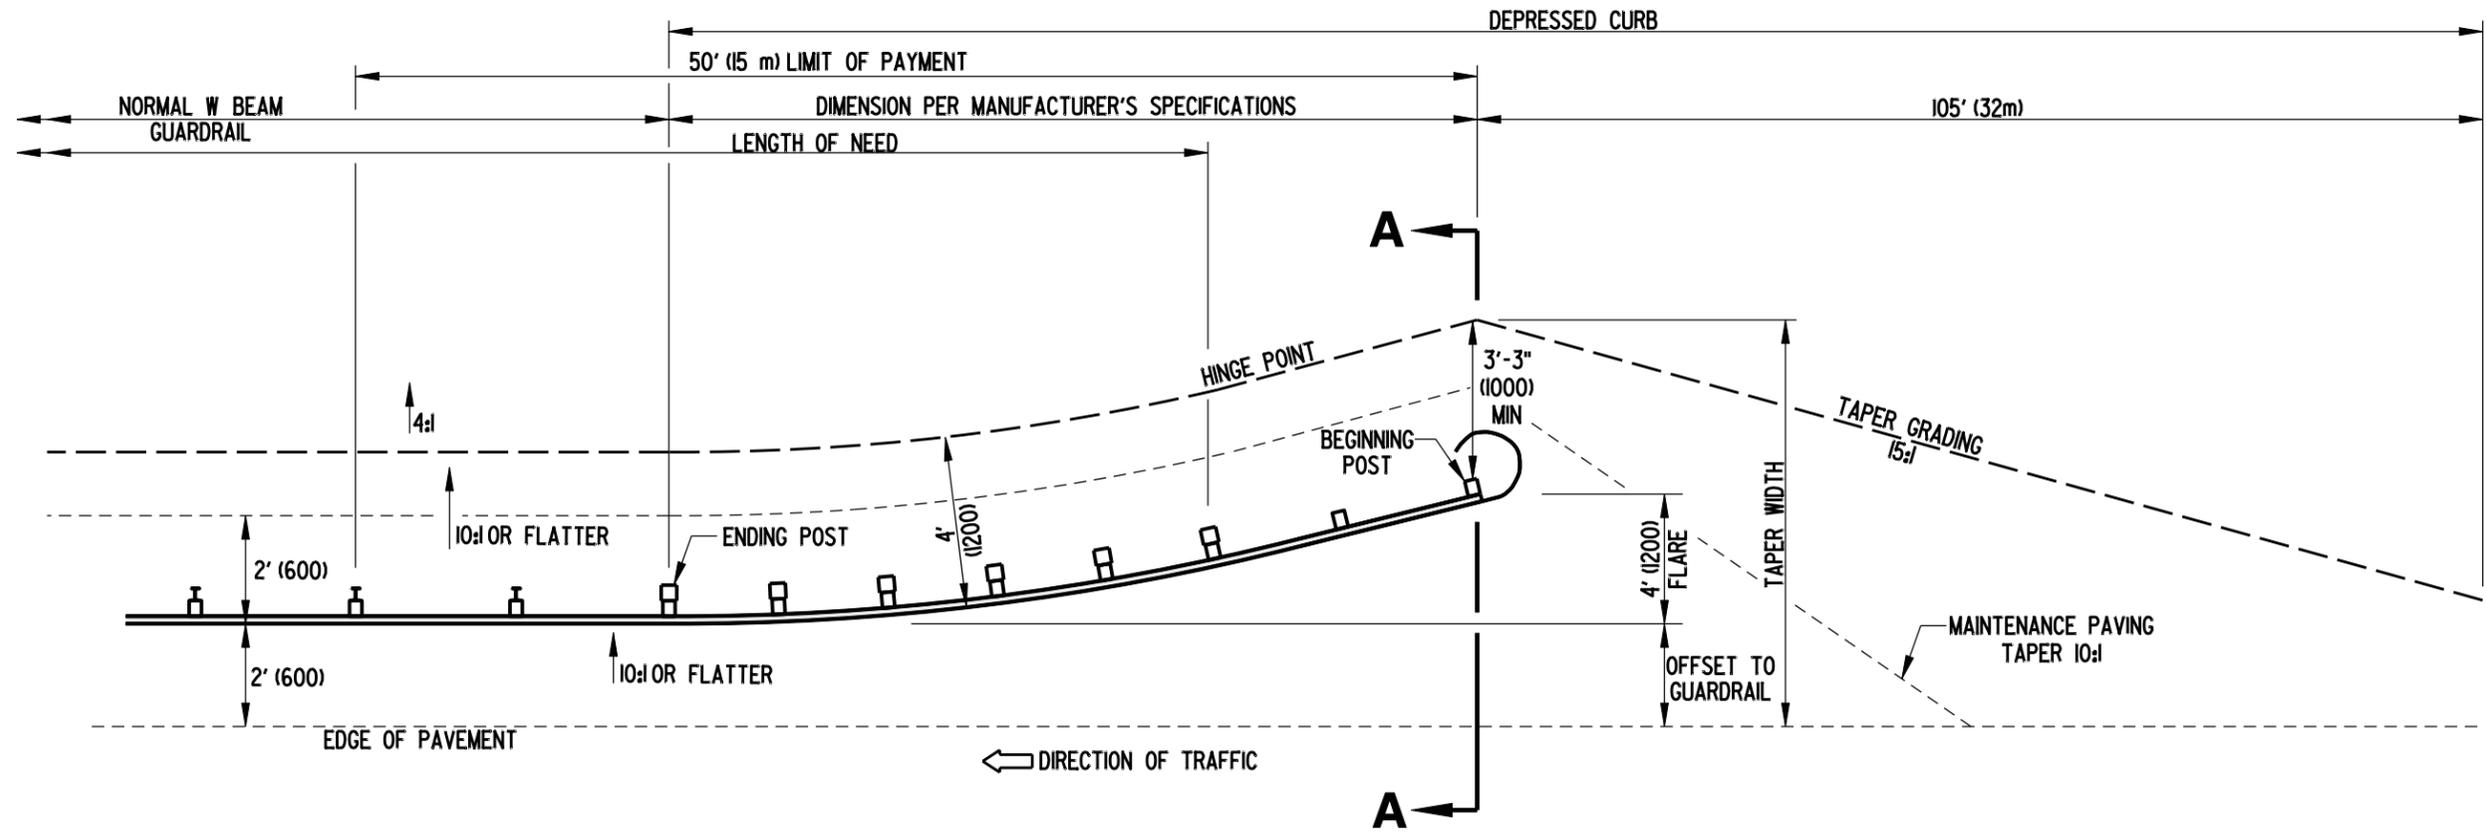

PLAN VIEW

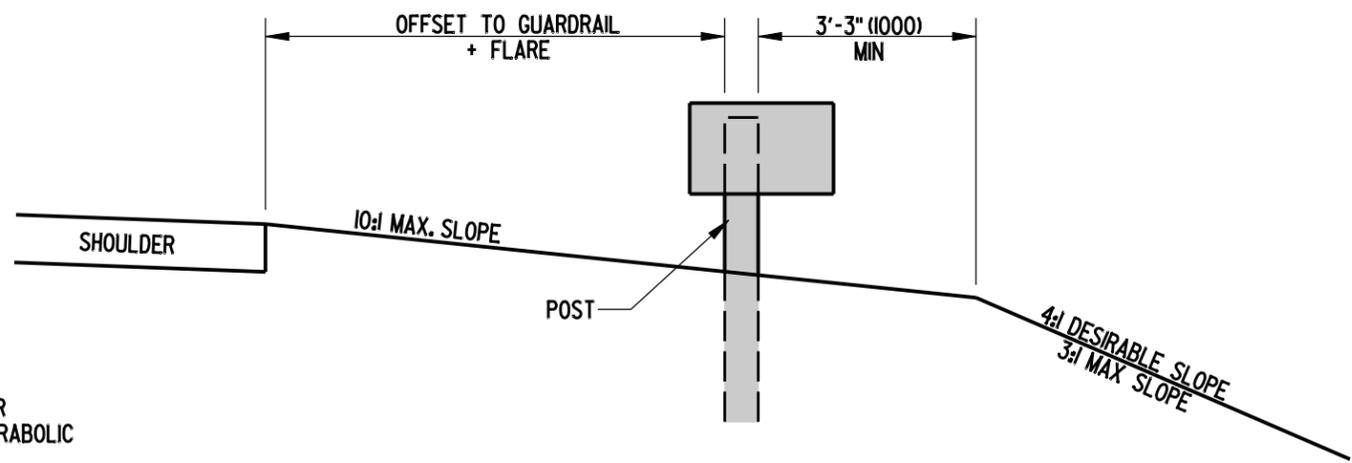


SECTION A-A

GRADING FOR GUARDRAIL END TREATMENT ATTENUATOR, TYPE 2

NOTES:

1. FLARE SHALL BE 4' (1200) UNLESS THE CONSTRUCTION PLANS OR SPECIFICATIONS SPECIFY A SMALLER FLARE. FLARE MAY BE PARABOLIC OR STRAIGHT BASED ON MANUFACTURE'S SPECIFICATIONS.
2. THIS DETAIL WAS SOLELY CREATED TO SHOW THE GRADING REQUIRED FOR THIS TYPE OF ATTENUATOR. THE GUARDRAIL END TREATMENT ATTENUATOR SHALL BE INSTALLED AS PER THE MANUFACTURER'S AND THE DEPARTMENT OF TRANSPORTATION'S SPECIFICATIONS.
3. IF CURB IS PRESENT, DEPRESS THE CURB TO A MAXIMUM HEIGHT OF 2\" (50) WITHIN THE LIMITS OF THE END TREATMENT AND THROUGHOUT THE LENGTH OF THE TAPER GRADING.

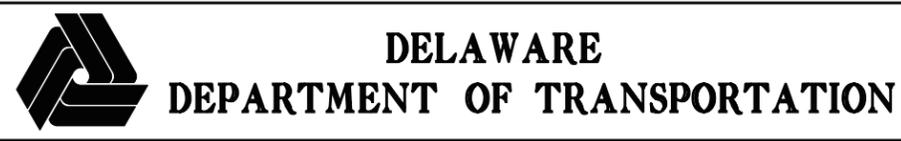

GUARDRAIL APPLICATIONS			
STANDARD NO.	B-1 (2007)	SHT.	5 OF 6

APPROVED *[Signature]* 10/24/07
CHIEF ENGINEER DATE

RECOMMENDED *[Signature]* 10/23/07
DESIGN ENGINEER DATE