


**STANDARD INSTALLATION (3+ DEVICES)**




**NOTES:**

- 1). INSTALLATION OF EQUIPMENT BETWEEN SERVICE PEDESTAL AND CONTROLLER CABINET SHALL BE AS PER CONTRACT DRAWINGS/DETAILS.
- 2). SEE DETAIL T-15, SHEET 1, FOR SIGN POST AND BREAKAWAY ASSEMBLY DETAILS.
- 3). ATTACH ALUMINUM PANEL TO SIGN POSTS WITH (6) 5/16" x 2 1/2" LONG GRADE 5 BOLTS, FLAT WASHERS, AND NYLON LOCK NUTS, 3 ON EACH SIDE.
- 4). MOUNT METER SOCKET TO ALUMINUM PANEL WITH (4) 5/16" x 3/4" STAINLESS STEEL BOLTS AND NYLON LOCK NUTS.
- 5). MOUNT CIRCUIT BREAKER BOX TO ALUMINUM PANEL WITH (4) 5/16" x 3/4" STAINLESS STEEL BOLTS AND NYLON LOCK NUTS.
- 6). ALL CONDUITS AND OTHER ASSOCIATED PIECES SHALL BE 2" RIGID GALVANIZED CONDUIT UNLESS SPECIFIED DIFFERENTLY ON THE PLANS OR BY LOCAL UTILITY COMPANY. ALL CONDUITS SHALL BE INSTALLED FROM ENCLOSURE TO TYPE 1 JUNCTION WELL. JUNCTION WELL SHALL BE PLACED WITHIN 10' OF SERVICE PEDESTAL (OR PER PLAN).

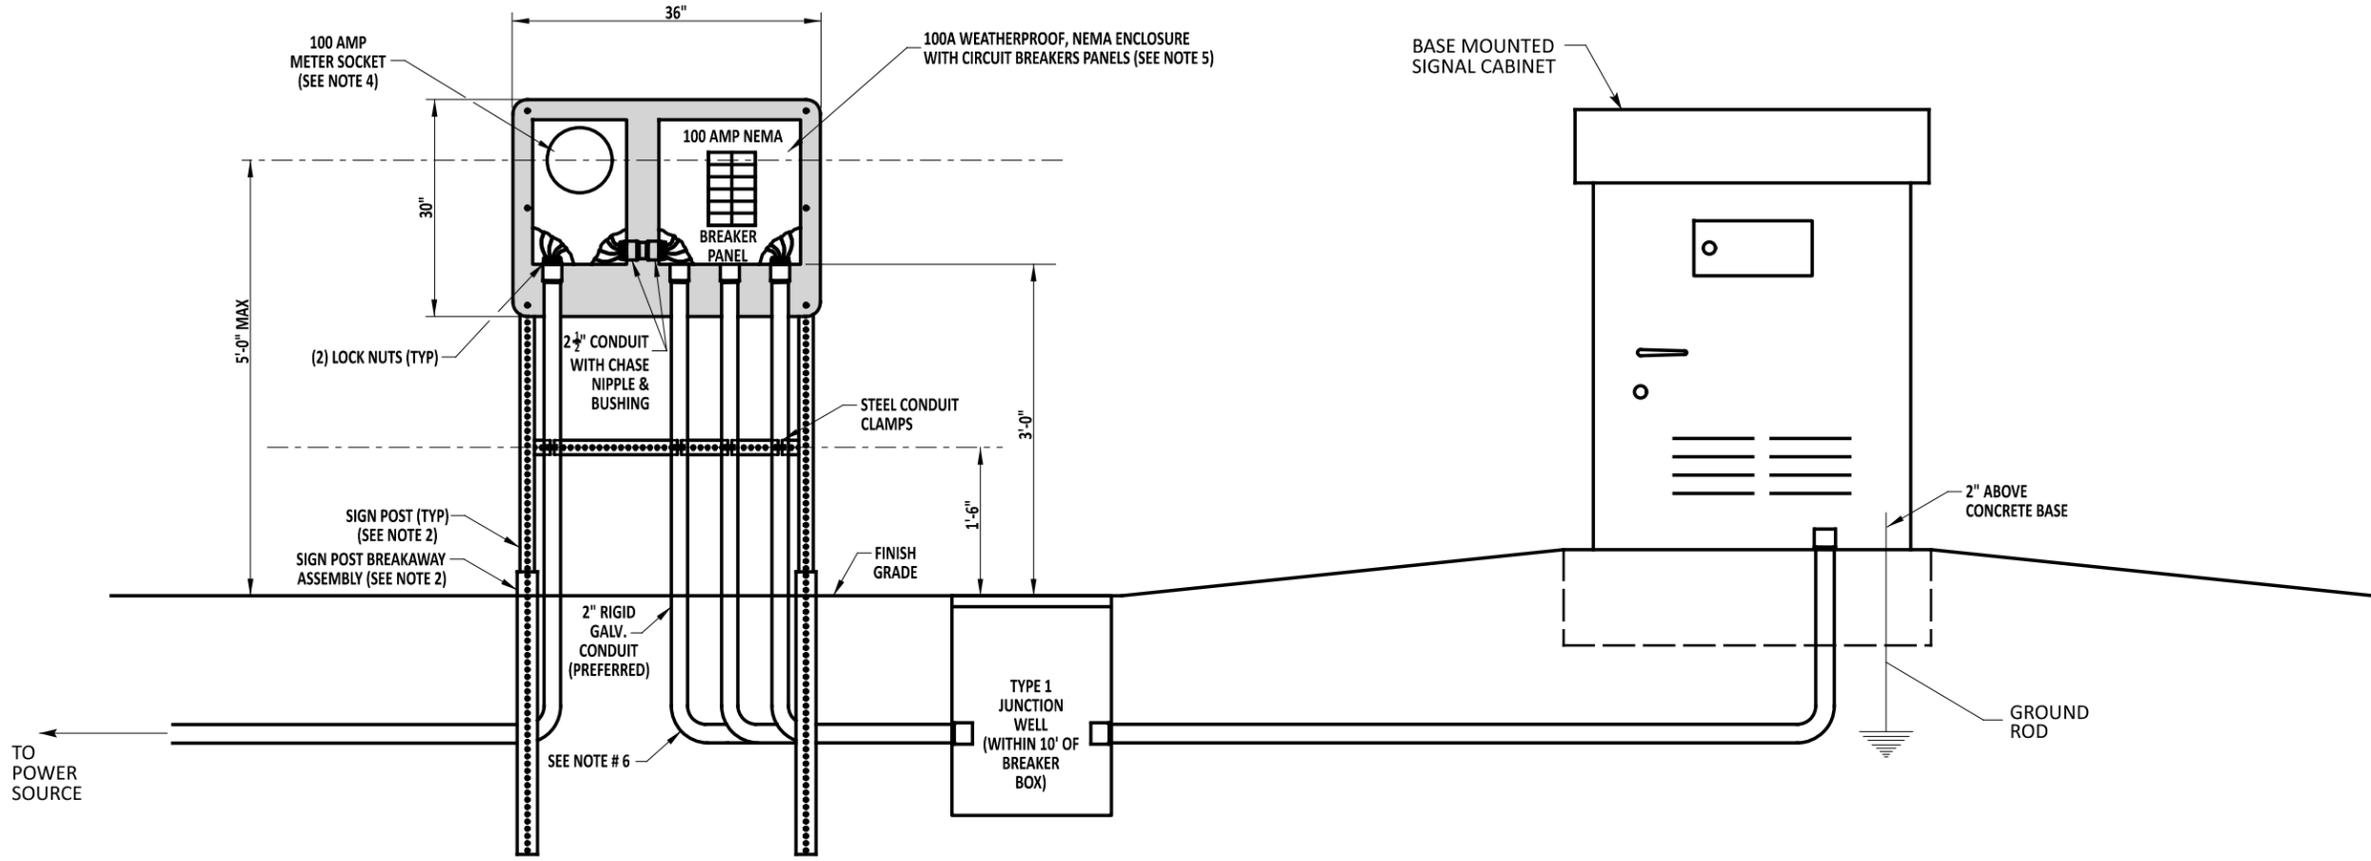

  
 ENGINEERING SUPPORT      DATE 09/01/2020  
**RECOMMENDED**

**ELECTRICAL SERVICE PEDESTAL -**  
**SIGNAL & ITS COMPONENT INSTALLATIONS - 100 AMP (3+ DEVICES)**  
 STANDARD NO.    T-17 (2020)      SHT. 1      OF 5

REVIEWED        
 DEPUTY DIRECTOR - DESIGN      DATE 09/01/2020  
 APPROVED        
 CHIEF ENGINEER      DATE 09/01/2020