




ISOMETRIC

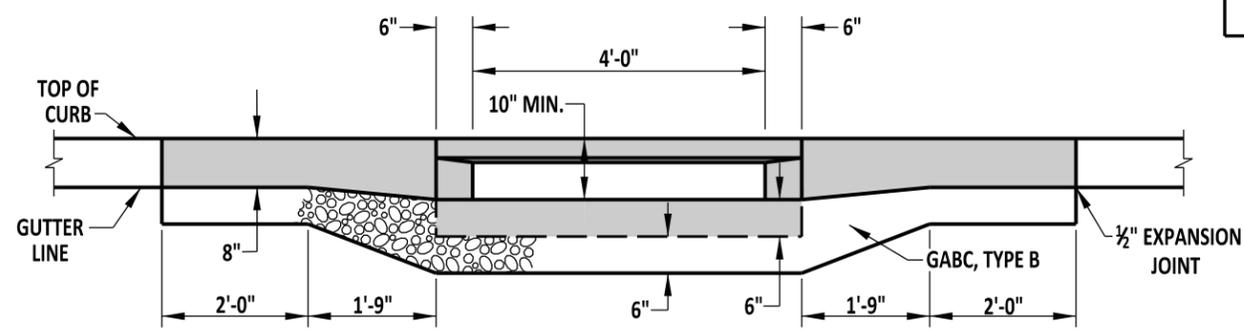


SECTION A-A

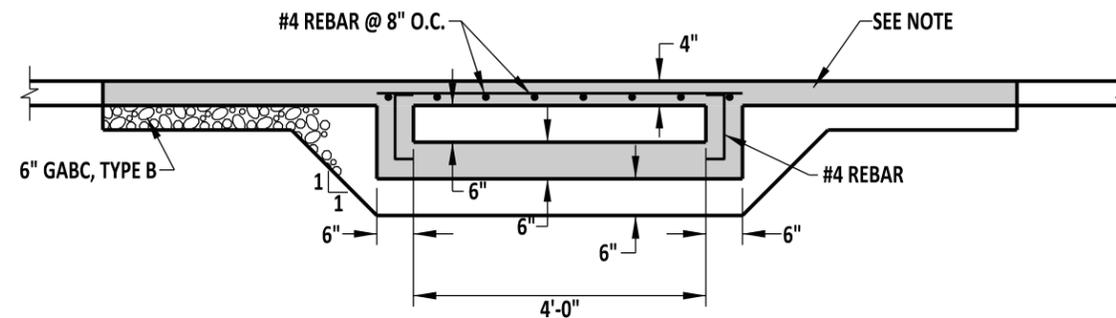


SECTION B-B

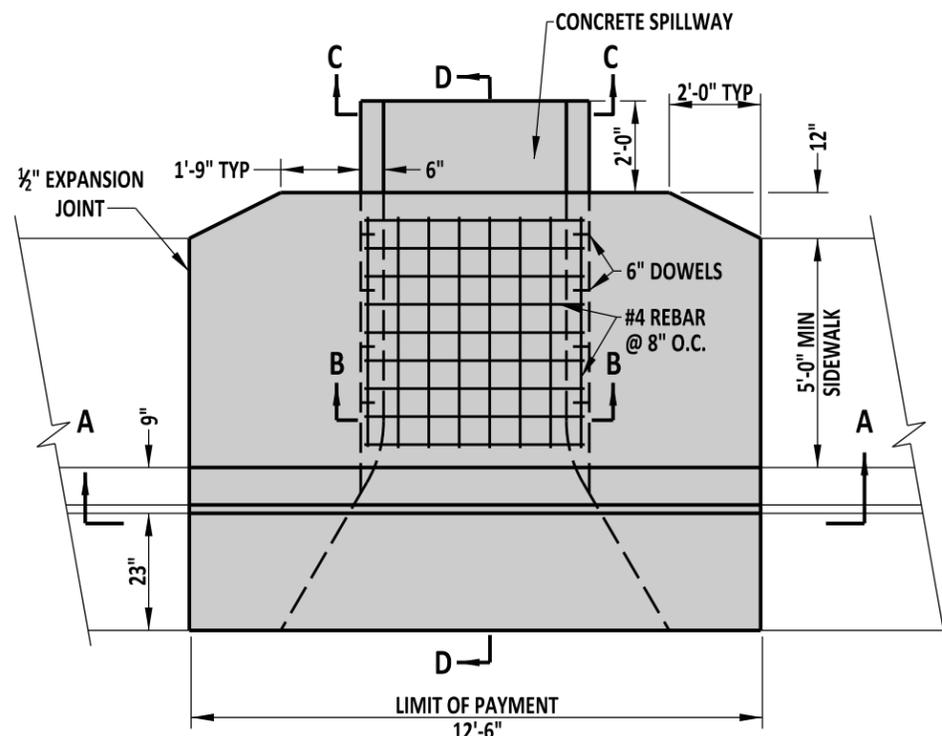


PLAN

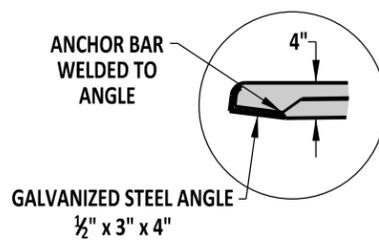

CURB / SIDEWALK OPENING

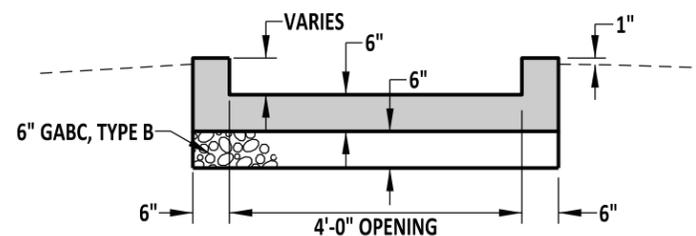

SECTION C-C

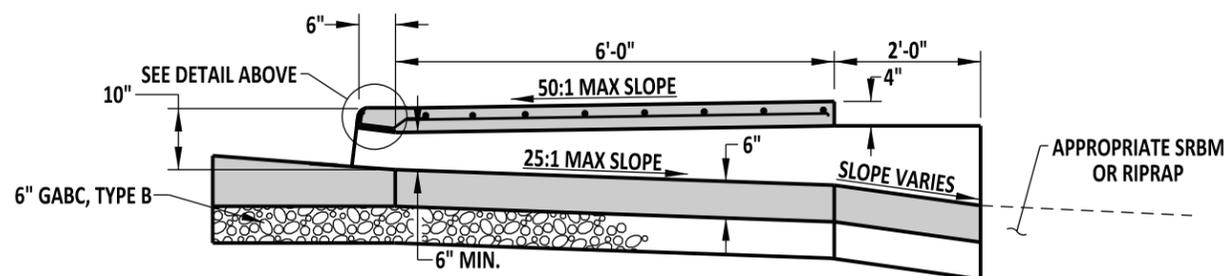

SECTION D-D

NOTE:
 WHEN A GRASS STRIP IS PRESENT BETWEEN THE BACK OF CURB AND SIDEWALK, THE SIDEWALK PORTION OF THIS STRUCTURE MAY BE PRECAST. HOWEVER, WHEN THE SIDEWALK IS DIRECTLY BEHIND THE CURB, THE ENTIRE UNIT MUST BE CAST-IN-PLACE.



DELAWARE
DEPARTMENT OF TRANSPORTATION

CURB OPENING WITH SIDEWALK DETAIL

STANDARD NO.

C-5 (2011)

SHT. 1

OF 1

APPROVED

SIGNATURE ON FILE
 CHIEF ENGINEER

12/22/2011
 DATE

RECOMMENDED

SIGNATURE ON FILE
 DESIGN ENGINEER

12/21/2011
 DATE