



SECTION A-A

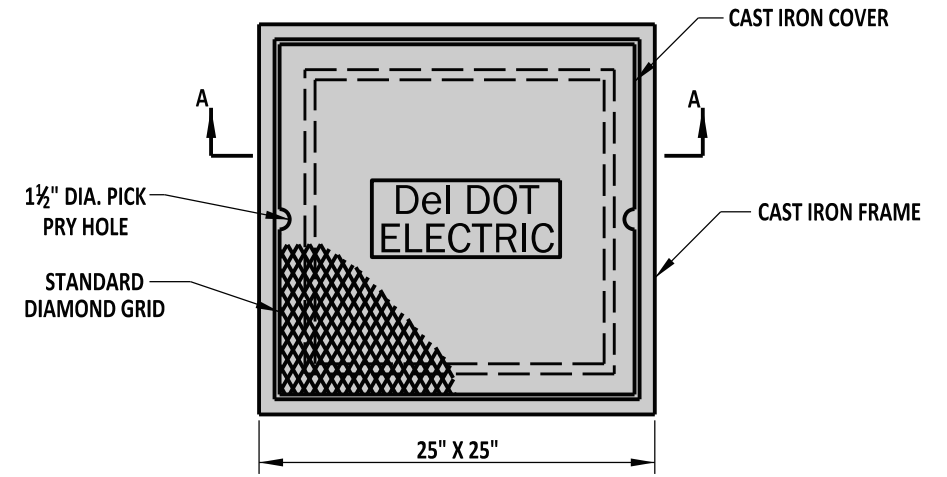

PLAN VIEW

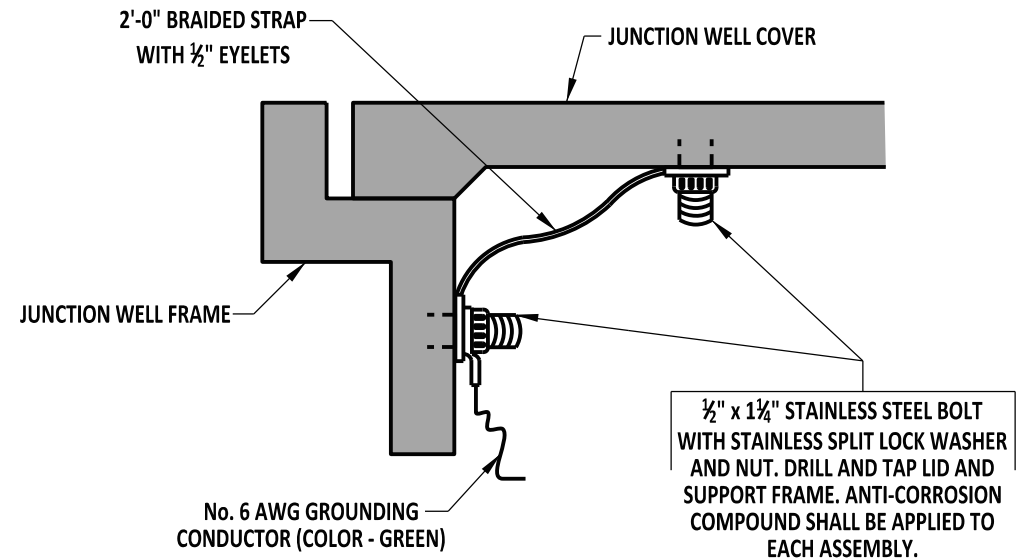

DETAIL "A"

NOTES:

- 1). TYPE 1 CONDUIT JUNCTION WELL SHALL BE PRECAST CONCRETE. AT LEAST ONE HOLE IN PRECAST WELLS WILL BE OF A 5" DIAMETER COMPLETELY THROUGH THE WALL. UNUSED HOLES SHALL BE PLUGGED.
- 2). CONDUIT JUNCTION WELLS SHALL NOT BE PLACED UNDER A TRAVELWAY.
- 3). ALL CONDUIT JUNCTION WELLS PLACED IN PAVED AREAS SHALL BE CONSTRUCTED FLUSH WITH THE FINISHED GRADE. ALL CONDUIT JUNCTION WELLS PLACED IN UNPAVED AREAS SHALL BE CONSTRUCTED ABOVE FINISHED GRADE AND GRADED TO DRAIN AWAY FROM THE WELL, AS DETAILED.
- 4). ALL CRACKS, GAPS, OR OPENINGS IN JUNCTION WELL WALL SHALL BE SEALED WITH CONCRETE.

 DELAWARE DEPARTMENT OF TRANSPORTATION	CONDUIT JUNCTION WELL, TYPE 1			APPROVED	SIGNATURE ON FILE <small>CHIEF ENGINEER</small>	02/14/2014 <small>DATE</small>
	STANDARD NO.	T-1 (2013)	SHT. 1 OF 3	RECOMMENDED	SIGNATURE ON FILE <small>DESIGN ENGINEER</small>	01/14/2014 <small>DATE</small>