




INTEGRAL P.C.C. CURB AND GUTTER
TYPE 1-8

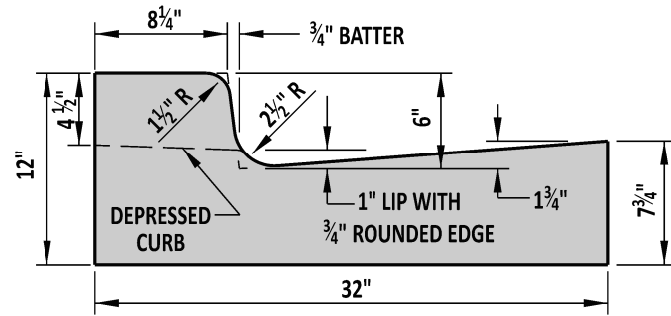


INTEGRAL P.C.C. CURB AND GUTTER
TYPE 1-6

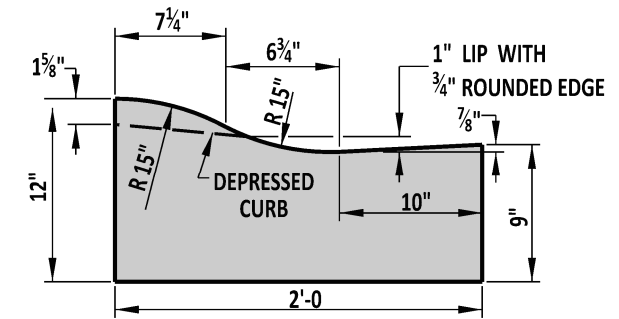

INTEGRAL P.C.C. CURB AND GUTTER
TYPE 2

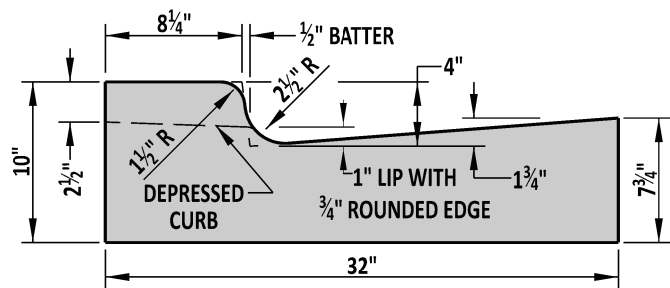


INTEGRAL P.C.C. CURB AND GUTTER
TYPE 1-4

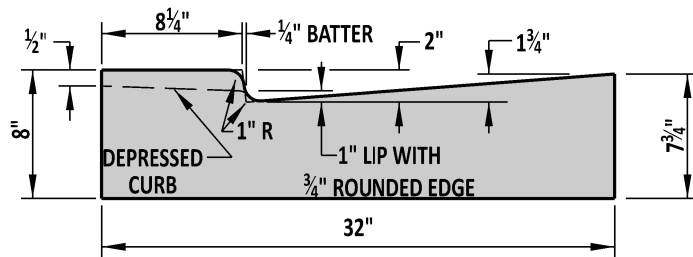


INTEGRAL P.C.C. CURB AND GUTTER
TYPE 1-2

NOTES:


- 1). WHEN P.C.C. CURB OR INTEGRAL P.C.C. CURB AND GUTTER IS PLACED ADJACENT TO PORTLAND CEMENT CONCRETE PAVEMENT, CONSTRUCT THE JOINT AS PER THE LONGITUDINAL JOINT SEALANT DETAIL ON DETAIL P-2, SHEET 3 OF 5. USE APPROVED JOINT FILLER TO SEAL. WORK TO BE PAID UNDER RESPECTIVE CURB AND GUTTER ITEM.
- 2). THE DEPRESSED CURB DIMENSIONS (INCLUDING 1" LIP) ON THIS SHEET ARE FOR USE AT ENTRANCES ONLY. FOR CURB DIMENSIONS AT CURB RAMPS, SEE NOTE 3.
- 3). SEE DETAIL C-1, SHEET 3 FOR DEPRESSING AT CURB RAMPS.
- 4). DEPRESS CURB FLUSH WITH PAVEMENT OR ADJACENT AREA AT LEADING EDGE OF TRIANGULAR ISLANDS, TAPERING BACK TO FULL HEIGHT AT A SLOPE OF 4:1. SEE DETAIL C-1, SHEET 1 OF 2 FOR TYPICAL SECTION OF TAPER AT NOSE OF MEDIAN ISLANDS.
- 5). 4" OF GABC, TYPE B SHALL BE PLACED UNDER ALL P.C.C. CURB AND P.C.C. CURB AND GUTTER. SEE DETAIL C-1, SHEET 1 OF 2 FOR TYPICAL SECTION.
- 6). DEPRESS END OF CURB RUNS NOT PART OF AN ISLAND OR MEDIAN FLUSH WITH PAVEMENT OR ADJACENT AREA AT A SLOPE OF 12:1.

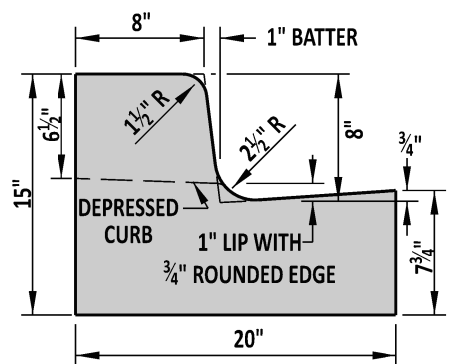


INTEGRAL P.C.C. CURB AND GUTTER
TYPE 3-8

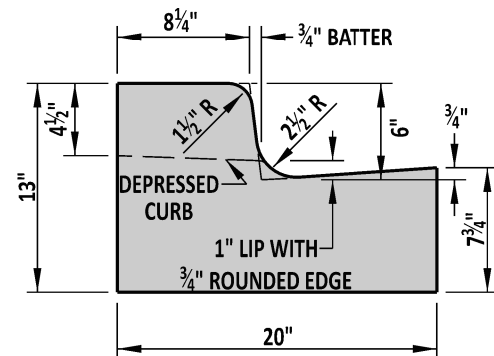

INTEGRAL P.C.C. CURB AND GUTTER
TYPE 3-6

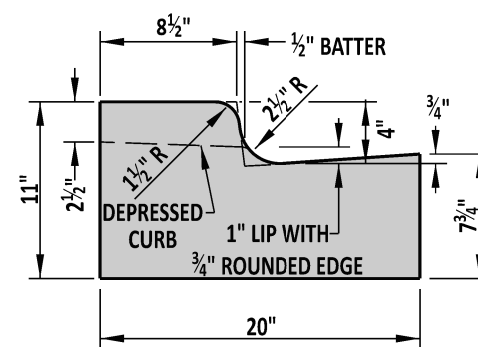

INTEGRAL P.C.C. CURB AND GUTTER
TYPE 3-4

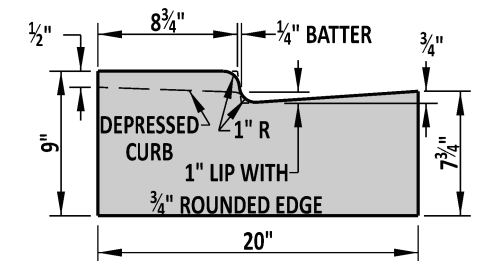

INTEGRAL P.C.C. CURB AND GUTTER
TYPE 3-2



DELAWARE
DEPARTMENT OF TRANSPORTATION

INTEGRAL P.C.C. CURB & GUTTER

STANDARD NO. C-1 (2017) SHT. 2 OF 3

APPROVED

SIGNATURE ON FILE
CHIEF ENGINEER

2/27/2019
DATE

RECOMMENDED

SIGNATURE ON FILE
DESIGN ENGINEER

2/25/2019
DATE