


PLAN VIEW

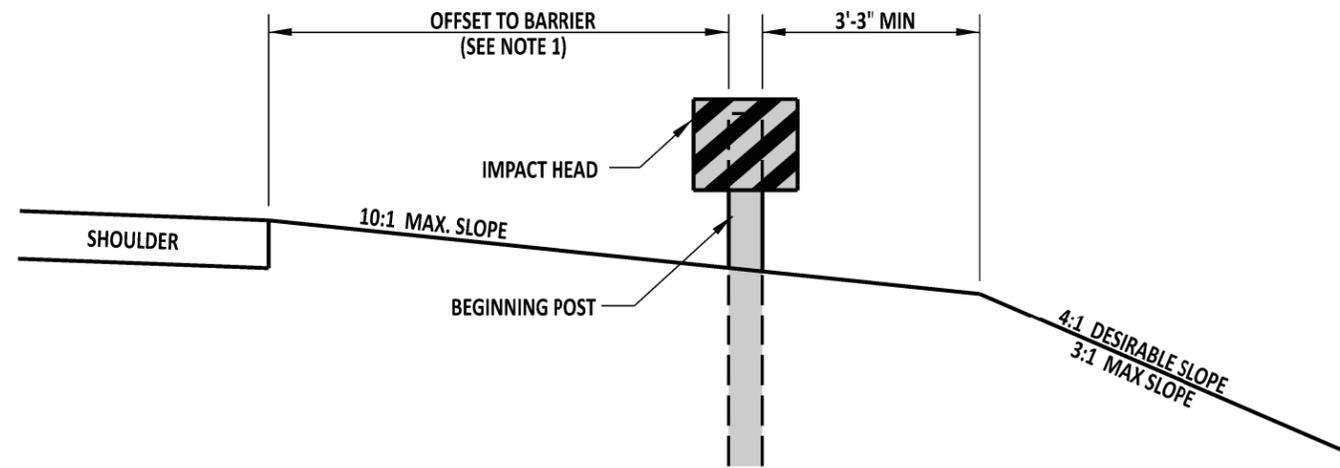

SECTION A-A

NOTES:

- 1). FLARE THE END TREATMENT AT 25:1 BEGINNING 50'-0" FROM THE END OF THE IMPACT HEAD, UNLESS THE CONSTRUCTION PLANS OR SPECIFICATIONS SPECIFY A SMALLER FLARE.
- 2). THIS DETAIL WAS SOLELY CREATED TO SHOW THE GRADING REQUIRED FOR THIS TYPE OF ATTENUATOR AND IS APPLICABLE REGARDLESS OF THE HEIGHT OF THE GUARDRAIL SYSTEM.
- 3). THE GUARDRAIL END TREATMENT ATTENUATOR SHALL BE INSTALLED AS PER THE MANUFACTURER'S AND THE DEPARTMENT OF TRANSPORTATION'S SPECIFICATIONS.
- 4). IF CURB IS PRESENT, DEPRESS THE CURB TO A MAXIMUM HEIGHT OF 2" WITHIN THE LIMITS OF THE END TREATMENT AND THROUGHOUT THE LENGTH OF THE TAPER GRADING.



DELAWARE
DEPARTMENT OF TRANSPORTATION

GRADING FOR GUARDRAIL END TREATMENT ATTENUATOR, TYPE 1		APPROVED	SIGNATURE ON FILE	1/04/2019
STANDARD NO.	B-2 (2018)	SHT. 1 OF 3	CHIEF ENGINEER	DATE
		RECOMMENDED	SIGNATURE ON FILE	12/20/2018
			DESIGN ENGINEER	DATE