



SCALE : NTS

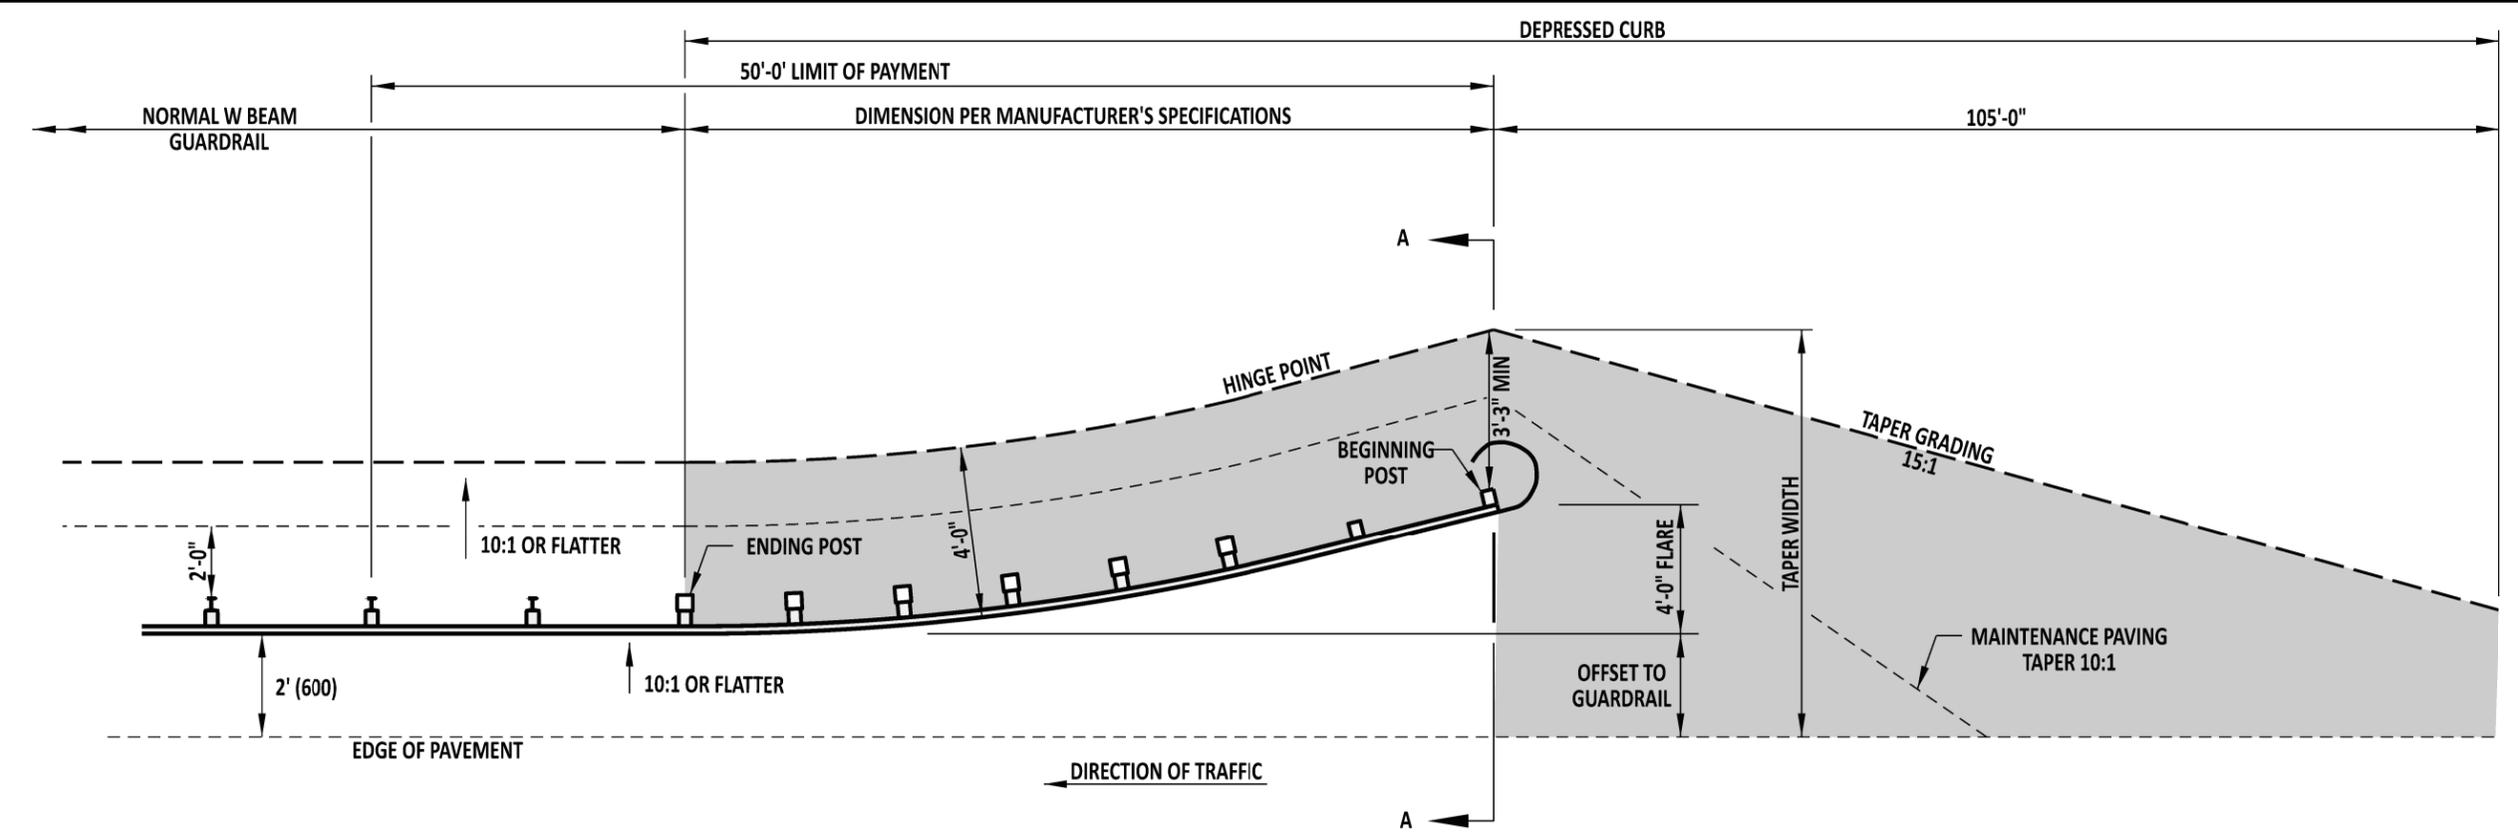

PLAN VIEW

■ = NO OBSTRUCTIONS IN SHADED AREA

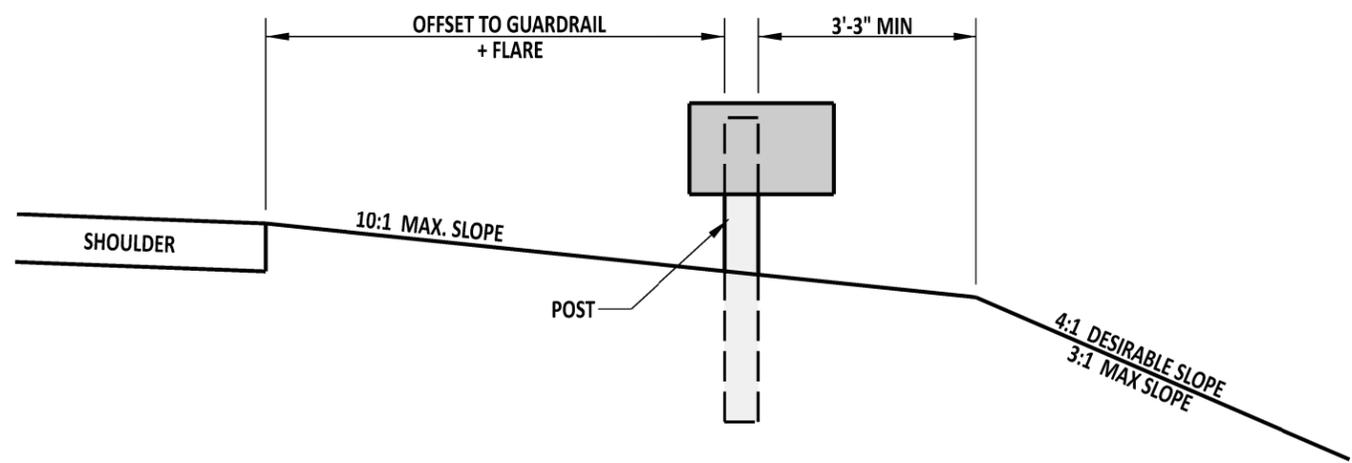

SECTION A-A

NOTES:

- 1). FLARE SHALL BE 4'-0" UNLESS THE CONSTRUCTION PLANS OR SPECIFICATIONS SPECIFY A SMALLER FLARE. FLARE MAY BE PARABOLIC OR STRAIGHT BASED ON MANUFACTURER'S SPECIFICATIONS.
- 2). THIS DETAIL WAS SOLELY CREATED TO SHOW THE GRADING REQUIRED FOR THIS TYPE OF ATTENUATOR AND IS APPLICABLE REGARDLESS OF THE HEIGHT OF THE GUARDRAIL SYSTEM.
- 3). THE GUARDRAIL END TREATMENT ATTENUATOR SHALL BE INSTALLED AS PER THE MANUFACTURER'S AND THE DEPARTMENT OF TRANSPORTATION'S SPECIFICATIONS.
- 4). IF CURB IS PRESENT, DEPRESS THE CURB TO A MAXIMUM HEIGHT OF 2" WITHIN THE LIMITS OF THE END TREATMENT AND THROUGHOUT THE LENGTH OF THE TAPER GRADING.

DELAWARE
DEPARTMENT OF TRANSPORTATION

GRADING FOR GUARDRAIL END TREATMENT ATTENUATOR, TYPE 2			
STANDARD NO.	B-2 (2018)	SHT.	2 OF 3

APPROVED	SIGNATURE ON FILE <small>CHIEF ENGINEER</small>	1/04/2019 <small>DATE</small>
RECOMMENDED	SIGNATURE ON FILE <small>DESIGN ENGINEER</small>	12/20/2018 <small>DATE</small>