




ISOMETRIC

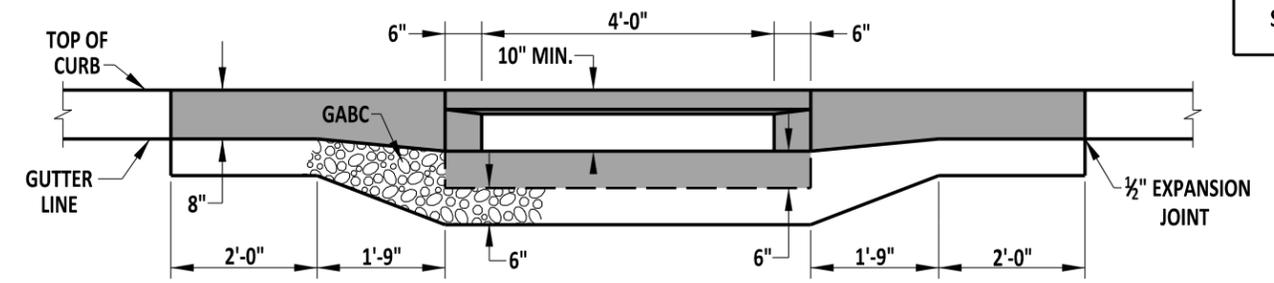


SECTION A-A

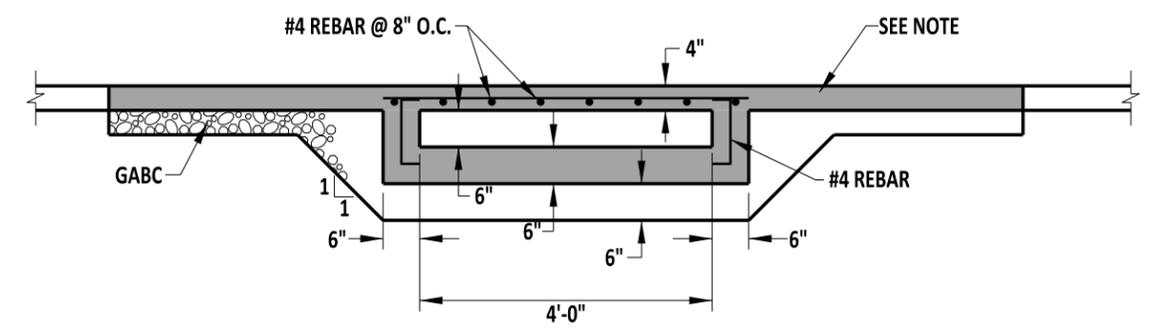


SECTION B-B

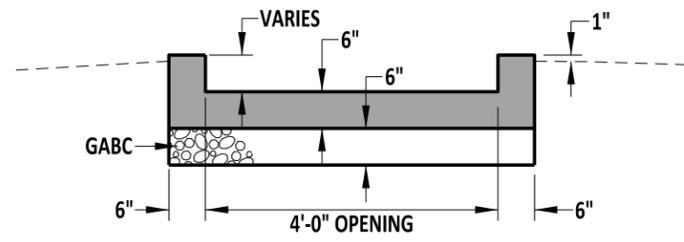


SECTION C-C

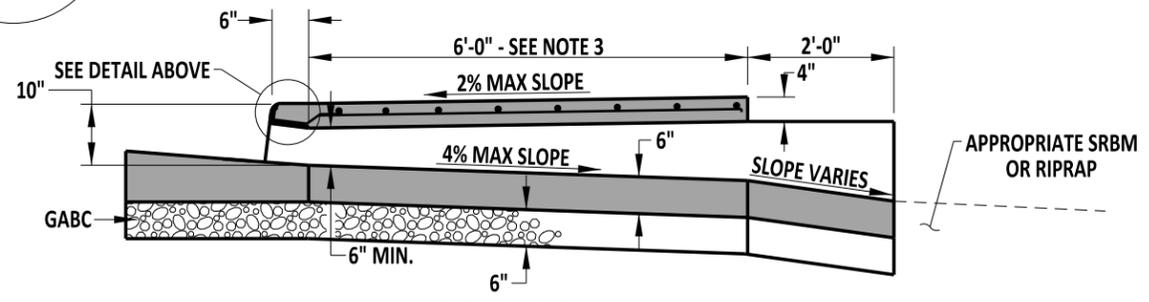

SECTION D-D

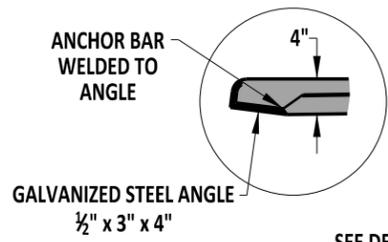

ANCHOR BAR WELDED TO ANGLE
GALVANIZED STEEL ANGLE 1/2" x 3" x 4"

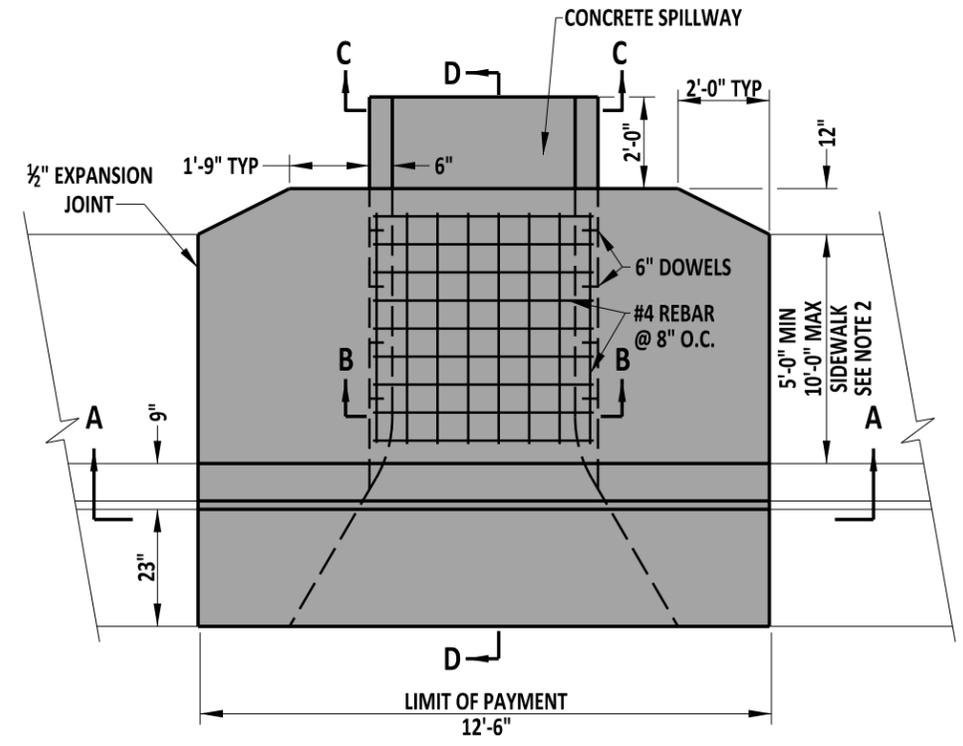

PLAN

CURB / SIDEWALK OPENING

NOTES:

- 1). WHEN A GRASS STRIP IS PRESENT BETWEEN THE BACK OF CURB AND SIDEWALK, THE SIDEWALK PORTION OF THIS STRUCTURE MAY BE PRECAST. HOWEVER, WHEN THE SIDEWALK IS DIRECTLY BEHIND THE CURB, USE CAST-IN-PLACE CONSTRUCTION.
- 2). SIDEWALK WIDTHS LESS THAN SHOWN ON THIS SHEET REQUIRE DEPARTMENT APPROVAL. SEE PEDESTRIAN ACCESSIBILITY STANDARDS FOR MORE GUIDANCE.
- 3). OVER THE CONCRETE SPILLWAY, USE A SLAB WIDTH 12" WIDER THAN THE SIDEWALK WIDTH AND USE A 2'-0" CONCRETE APRON APPROACH. WHEN NOT ADJACENT TO CURB, USE A SLAB WIDTH 12" WIDER THAN THE SIDEWALK ON BOTH SIDES.



ENGINEERING SUPPORT
Paul John
RECOMMENDED
DATE 09/01/2020

CURB / SIDEWALK OPENING
STANDARD NO. C-5 (2020)
SHT. 1 OF 1

REVIEWED
Mike Lee
DEPUTY DIRECTOR - DESIGN
DATE 09/01/2020
APPROVED
Sheryl
CHIEF ENGINEER
DATE 09/01/2020