PROJECT SCHEDULE

Schedule

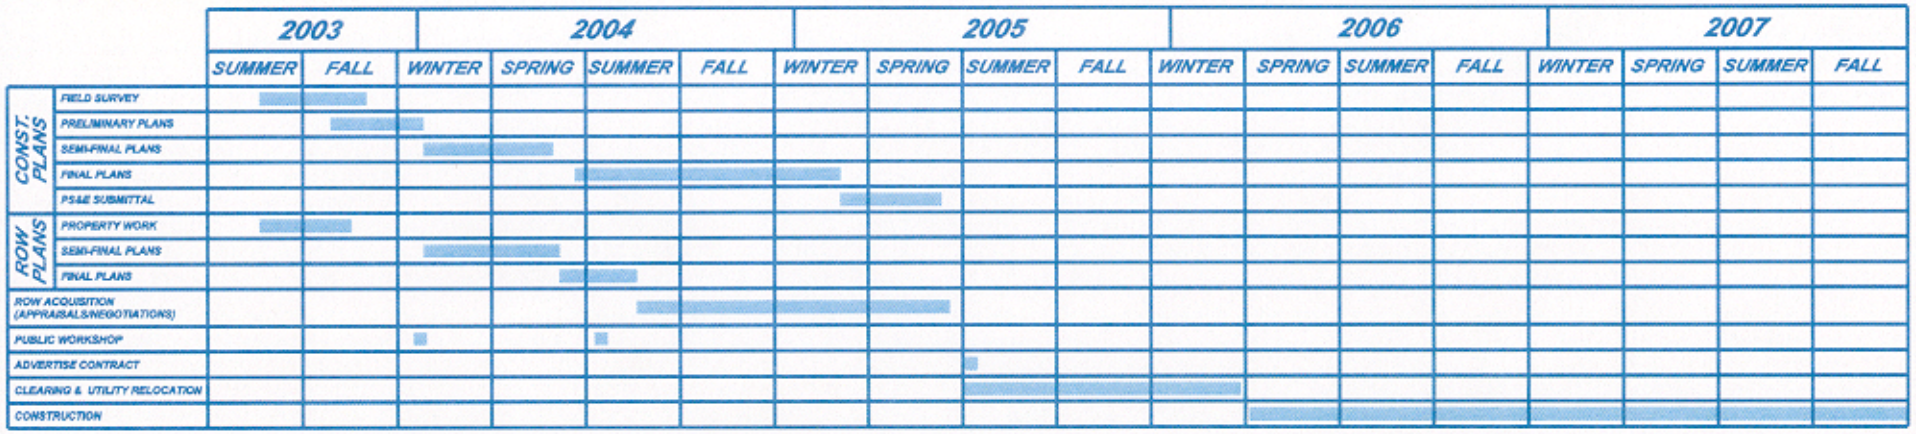

What's Been Done?

The Choptank Road Improvements Project has been underway for several years. Key steps have already been undertaken:

- Preliminary evaluation of historic and archeological resources in the study area.
- Three public workshops were held in 2000 and 2001 as part of the conceptual design process.
- The preliminary design concept, developed with help from public comment, is being presented today.

Delaware Department of Transportation

Choptank Road Improvements Project

Edwards AND Kelcey

UTILITY IMPACTS

Electric

- Conectiv Power has plans to upgrade their facilities from Armstrong Corner Road to Bethel Church Road. They are working with the design team to coordinate their changes. All utility poles in this area will be replaced.
- From Bunker Hill Road to Armstrong Corner Road, there are no upgrades planned. However, some poles will be replaced due to a shift in the alignment to avoid the Holton Historical Site.

Gas & Sewer

- There are no changes or upgrades anticipated.

Water

- Artesian Water has plans to upgrade some of their facilities. They are working with the design team to coordinate their changes.

Telephone

- Verizon's facilities will be relocated along with Conectiv's poles. There are also underground conflicts that will be resolved through coordination with the design team.

Cable

- Charter Communications' facilities will be relocated along with Conectiv's poles.

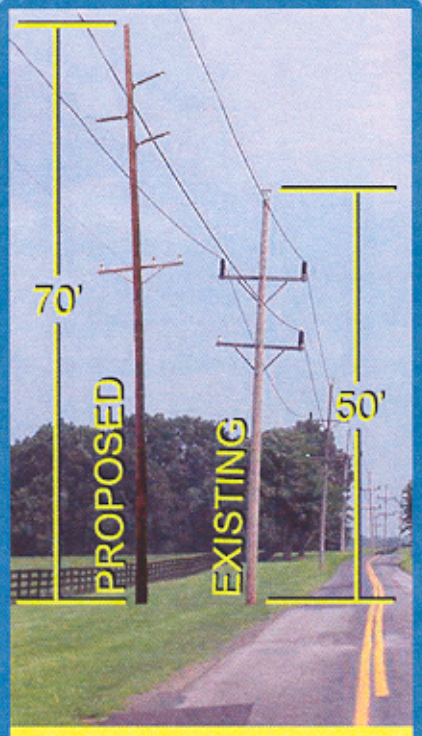

Existing vs. Proposed Poles

Impacts at Fox Hunter Crossing

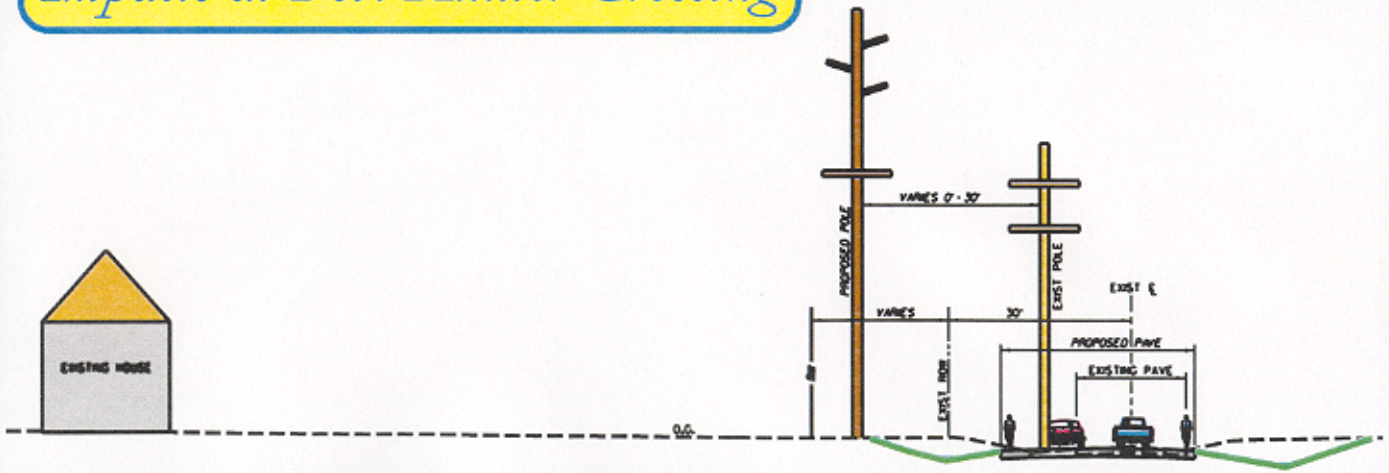

Delaware Department of Transportation

Choptank Road Improvements Project

Edwards AND Kelcey

TYPICAL SECTION Choptank

Existing

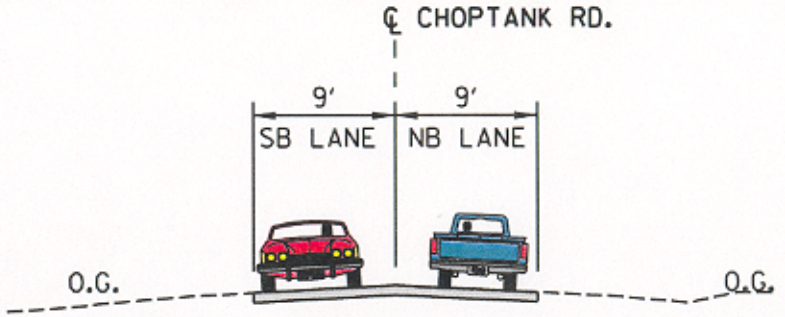

Proposed

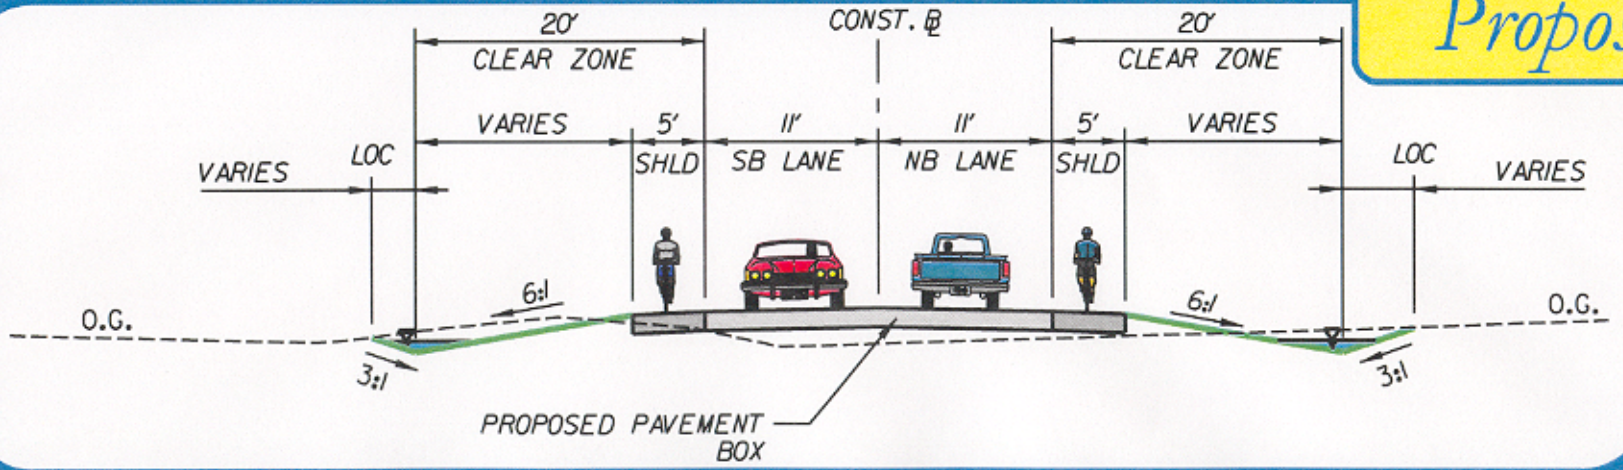

Delaware Department of Transportation

Choptank Road Improvements Project

Edwards AND Kelcey